

**Lecture 22:**

# **Spark**

**(leveraging bulk-granularity program structure)**

---

**Parallel Computer Architecture and Programming**

**CMU 15-418/15-618, Spring 2017**

# Tunes

## Yeah Yeah Yeahs

**Sacrilege**

**(Mosquito)**

*"In-memory performance and fault-tolerance across a cluster. No way!"*

*- Karen O*

# Review: which program performs better?

## Program 1

```
void add(int n, float* A, float* B, float* C) {  
    for (int i=0; i<n; i++)  
        C[i] = A[i] + B[i];  
}
```

Two loads, one store per math op  
(arithmetic intensity = 1/3)

```
void mul(int n, float* A, float* B, float* C) {  
    for (int i=0; i<n; i++)  
        C[i] = A[i] * B[i];  
}
```

Two loads, one store per math op  
(arithmetic intensity = 1/3)

```
float* A, *B, *C, *D, *E, *tmp1, *tmp2;
```

```
// assume arrays are allocated here
```

```
// compute E = D + ((A + B) * C)
```

```
add(n, A, B, tmp1);
```

```
mul(n, tmp1, C, tmp2);
```

```
add(n, tmp2, D, E);
```

Overall arithmetic intensity = 1/3

## Program 2

```
void fused(int n, float* A, float* B, float* C, float* D, float* E) {  
    for (int i=0; i<n; i++)  
        E[i] = D[i] + (A[i] + B[i]) * C[i];  
}
```

Four loads, one store per 3 math ops  
(arithmetic intensity = 3/5)

```
// compute E = D + (A + B) * C
```

```
fused(n, A, B, C, D, E);
```

The transformation of the code in program 1 to the code in program 2 is called "loop fusion"

# Review: why did we perform this transform?


## Program 1

```
int WIDTH = 1024;
int HEIGHT = 1024;
float input[(WIDTH+2) * (HEIGHT+2)];
float tmp_buf[WIDTH * (HEIGHT+2)];
float output[WIDTH * HEIGHT];

float weights[] = {1.0/3, 1.0/3, 1.0/3};

// blur image horizontally
for (int j=0; j<(HEIGHT+2); j++)
  for (int i=0; i<WIDTH; i++) {
    float tmp = 0.f;
    for (int ii=0; ii<3; ii++)
      tmp += input[j*(WIDTH+2) + i+ii] * weights[ii];
    tmp_buf[j*WIDTH + i] = tmp;
  }

// blur tmp_buf vertically
for (int j=0; j<HEIGHT; j++) {
  for (int i=0; i<WIDTH; i++) {
    float tmp = 0.f;
    for (int jj=0; jj<3; jj++)
      tmp += tmp_buf[(j+jj)*WIDTH + i] * weights[jj];
    output[j*WIDTH + i] = tmp;
  }
}
```

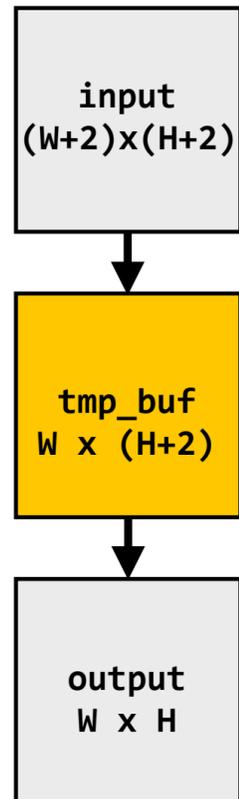


## Program 2

```
int WIDTH = 1024;
int HEIGHT = 1024;
float input[(WIDTH+2) * (HEIGHT+2)];
float tmp_buf[WIDTH * (CHUNK_SIZE+2)];
float output[WIDTH * HEIGHT];

float weights[] = {1.0/3, 1.0/3, 1.0/3};

for (int j=0; j<HEIGHT; j+CHUNK_SIZE) {
  // blur region of image horizontally
  for (int j2=0; j2<CHUNK_SIZE+2; j2++)
    for (int i=0; i<WIDTH; i++) {
      float tmp = 0.f;
      for (int ii=0; ii<3; ii++)
        tmp += input[(j+j2)*(WIDTH+2) + i+ii] * weights[ii];
      tmp_buf[j2*WIDTH + i] = tmp;
    }

  // blur tmp_buf vertically
  for (int j2=0; j2<CHUNK_SIZE; j2++)
    for (int i=0; i<WIDTH; i++) {
      float tmp = 0.f;
      for (int jj=0; jj<3; jj++)
        tmp += tmp_buf[(j2+jj)*WIDTH + i] * weights[jj];
      output[(j+j2)*WIDTH + i] = tmp;
    }
}
```

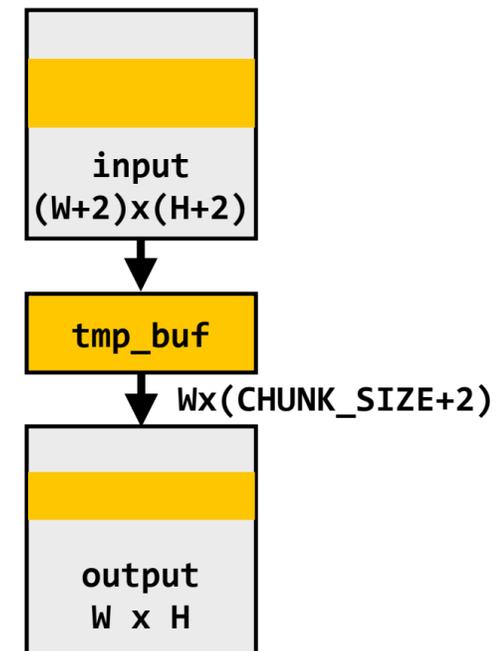

**Both of the previous examples involved globally restructuring the order of computation to improve producer-consumer locality**

**(improve arithmetic intensity of program)**



# Let's say 418 gets very popular...




**We're taking the 1989 Tour to the Parallelism Computation!**

**You kids might want to learn to handle at least two directions before you take a stab at 16 cores. Count me in.**



**Your name might be Swift, but your code can't keep up with ours.**

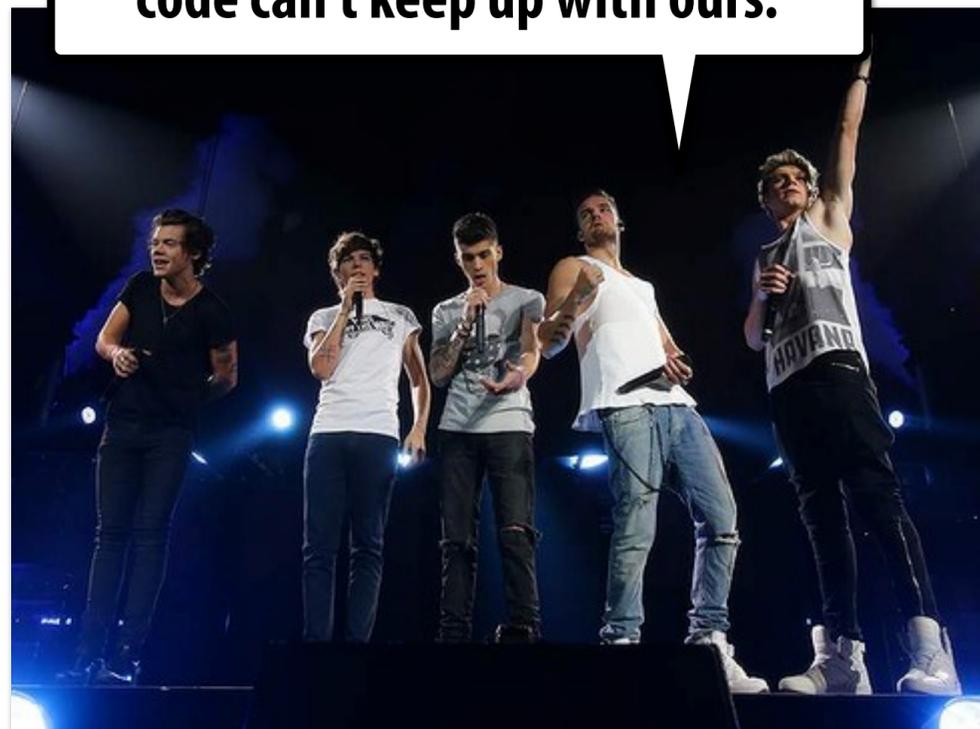


# The log of page views gets quite large...

Assume 15418log.txt is a large file, stored in a distributed file system, like HDFS

Below: cluster of 4 nodes, each node with a 1 TB disk

Contents of 15418log.txt are distributed evenly in blocks across the cluster

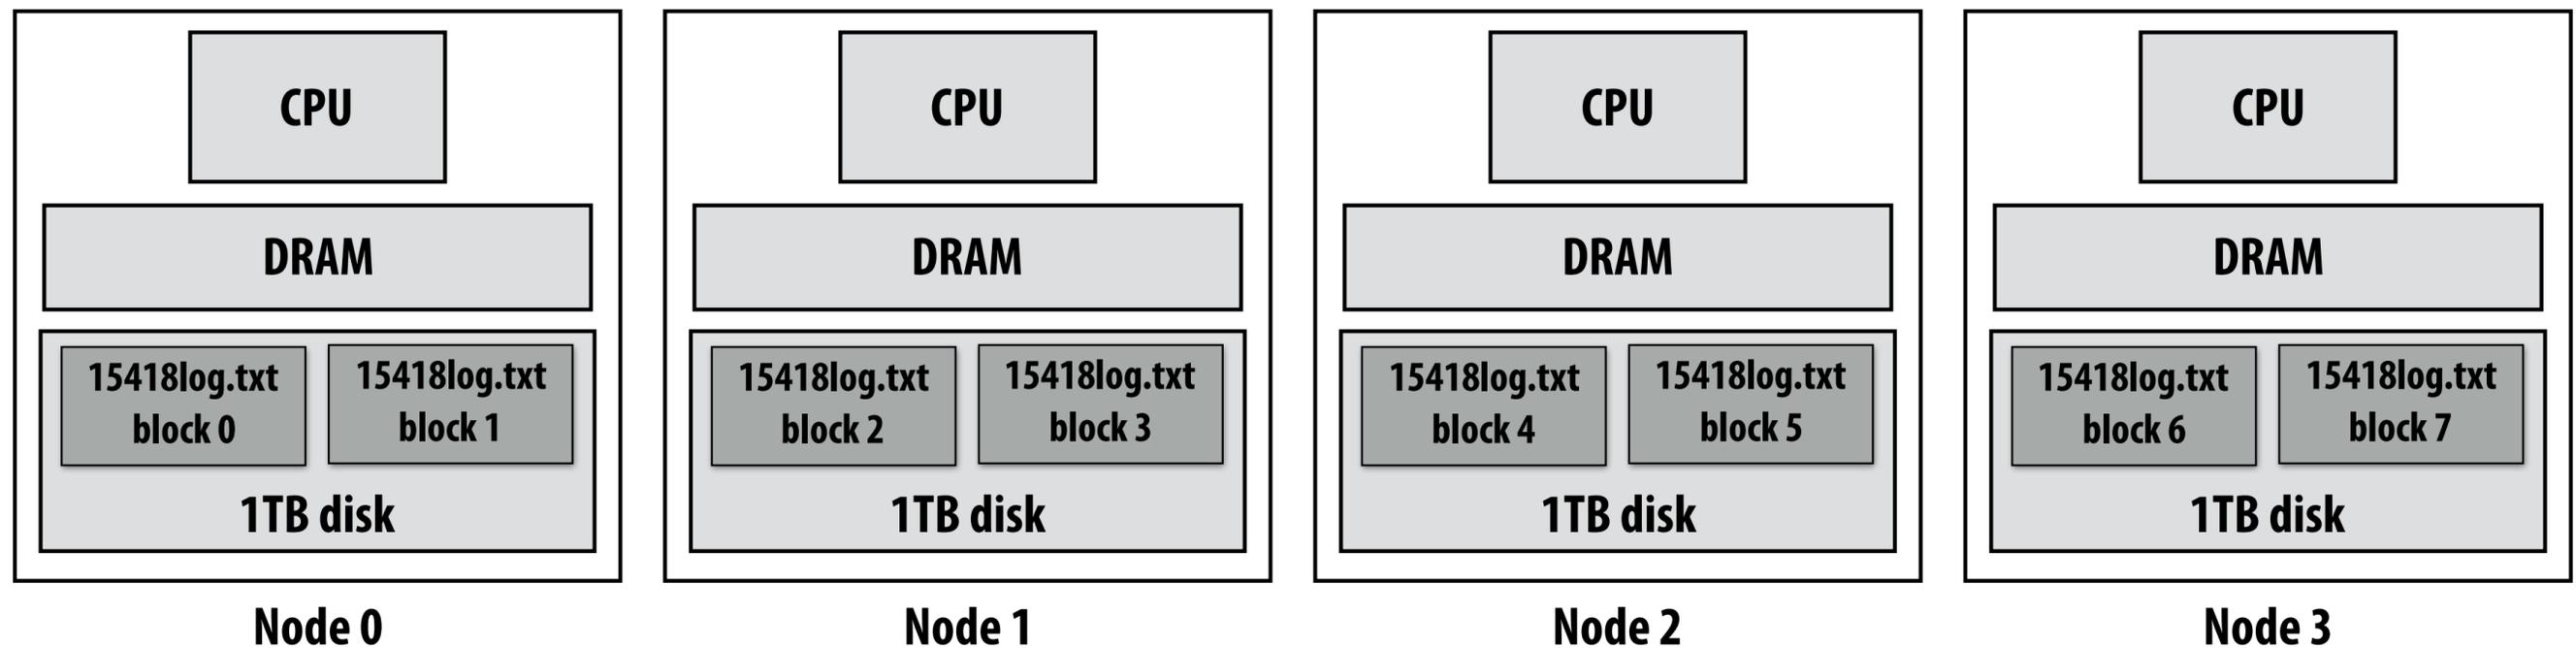

**Imagine the agents of the new Parallelism Competition entrants want to know a bit more about the fans tracking the competition on the 418 site...**

**For example:**

**“What type of mobile phone are all my client’s fans using?”**

# A simple programming model

```
// called once per line in input file by runtime
// input: string (line of input file)
// output: adds (user_agent, 1) entry to list
void mapper(string line, multimap<string,string>& results) {
    string user_agent = parse_requester_user_agent(line);
    if (is_mobile_client(user_agent))
        results.add(user_agent, 1);
}

// called once per unique key (user_agent) in results
// values is a list of values associated with the given key
void reducer(string key, list<string> values, int& result) {
    int sum = 0;
    for (v in values)
        sum += v;
    result = sum;
}

// iterator over lines of text file
LineByLineReader input("hdfs://15418log.txt");

// stores output
Writer output("hdfs://...");

// do stuff
runMapReduceJob(mapper, reducer, input, output);
```

**(The code above computes the count of page views by each type of mobile phone.)**

# **Let's design an implementation of runMapReduceJob**

# Step 1: running the mapper function

```
// called once per line in file
void mapper(string line, multimap<string,string>& results) {
    string user_agent = parse_requester_user_agent(line);
    if (is_mobile_client(user_agent))
        results.add(user_agent, 1);
}

// called once per unique key in results
void reducer(string key, list<string> values, int& result) {
    int sum = 0;
    for (v in values)
        sum += v;
    result = sum;
}



LineByLineReader input("hdfs://15418log.txt");
Writer output("hdfs://...");
runMapReduceJob(mapper, reducer, input, output);
```

**Step 1: run mapper function on all lines of file**

**Question: How to assign work to nodes?**

**Idea 1: use work queue for list of input blocks to process**  
**Dynamic assignment: free node takes next available block**

**Idea 2: data distribution based assignment: Each node processes lines in blocks of input file that are stored locally.**

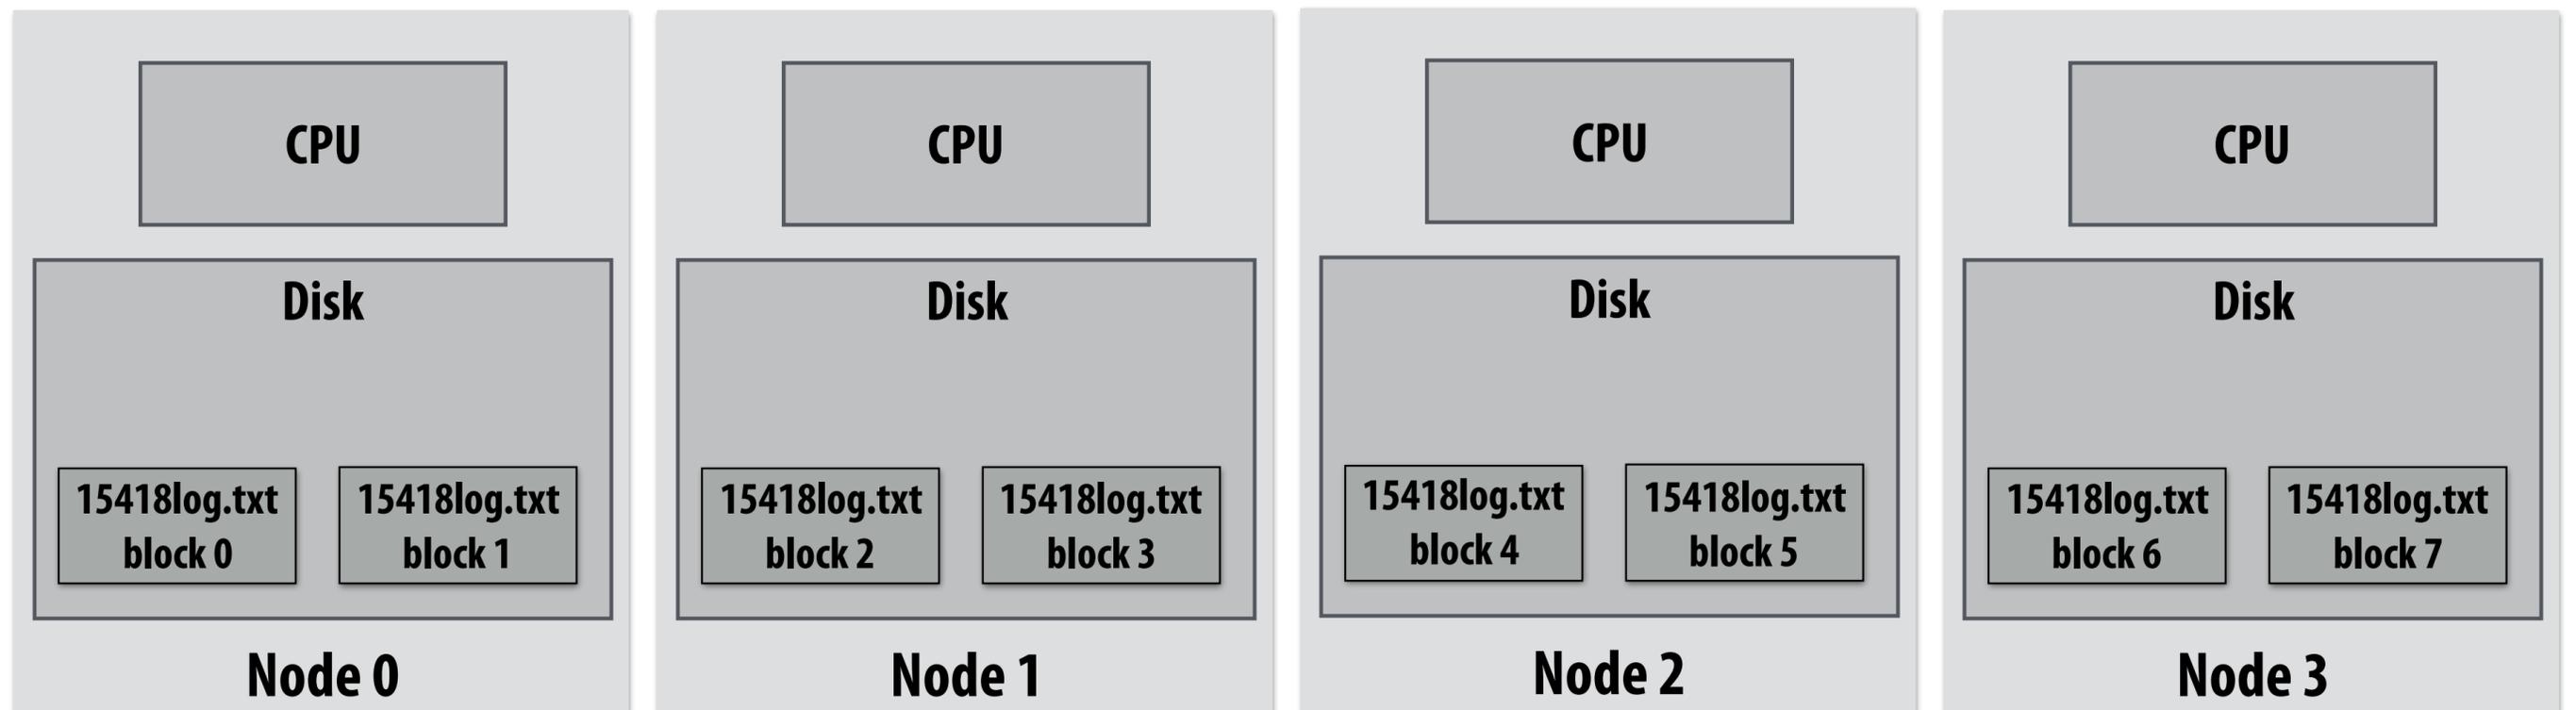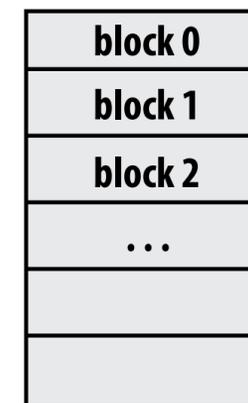

# Steps 2 and 3: gathering data, running the reducer

```
// called once per line in file
void mapper(string line, map<string,string> results) {
    string user_agent = parse_requester_user_agent(line);
    if (is_mobile_client(user_agent))
        results.add(user_agent, 1);
}

// called once per unique key in results
void reducer(string key, list<string> values, int& result) {
    int sum = 0;
    for (v in values)
        sum += v;
    result = sum;
}

LineByLineReader input("hdfs://15418log.txt");
Writer output("hdfs://...");
runMapReduceJob(mapper, reducer, input, output);
```

**Step 2: Prepare intermediate data for reducer**


**Step 3: Run reducer function on all keys**

**Question: how to assign reducer tasks?**

**Question: how to get all data for key onto the correct worker node?**

**Keys to reduce:  
(generated by mapper):**

Safari iOS
Chrome
Safari iWatch
Chrome Glass

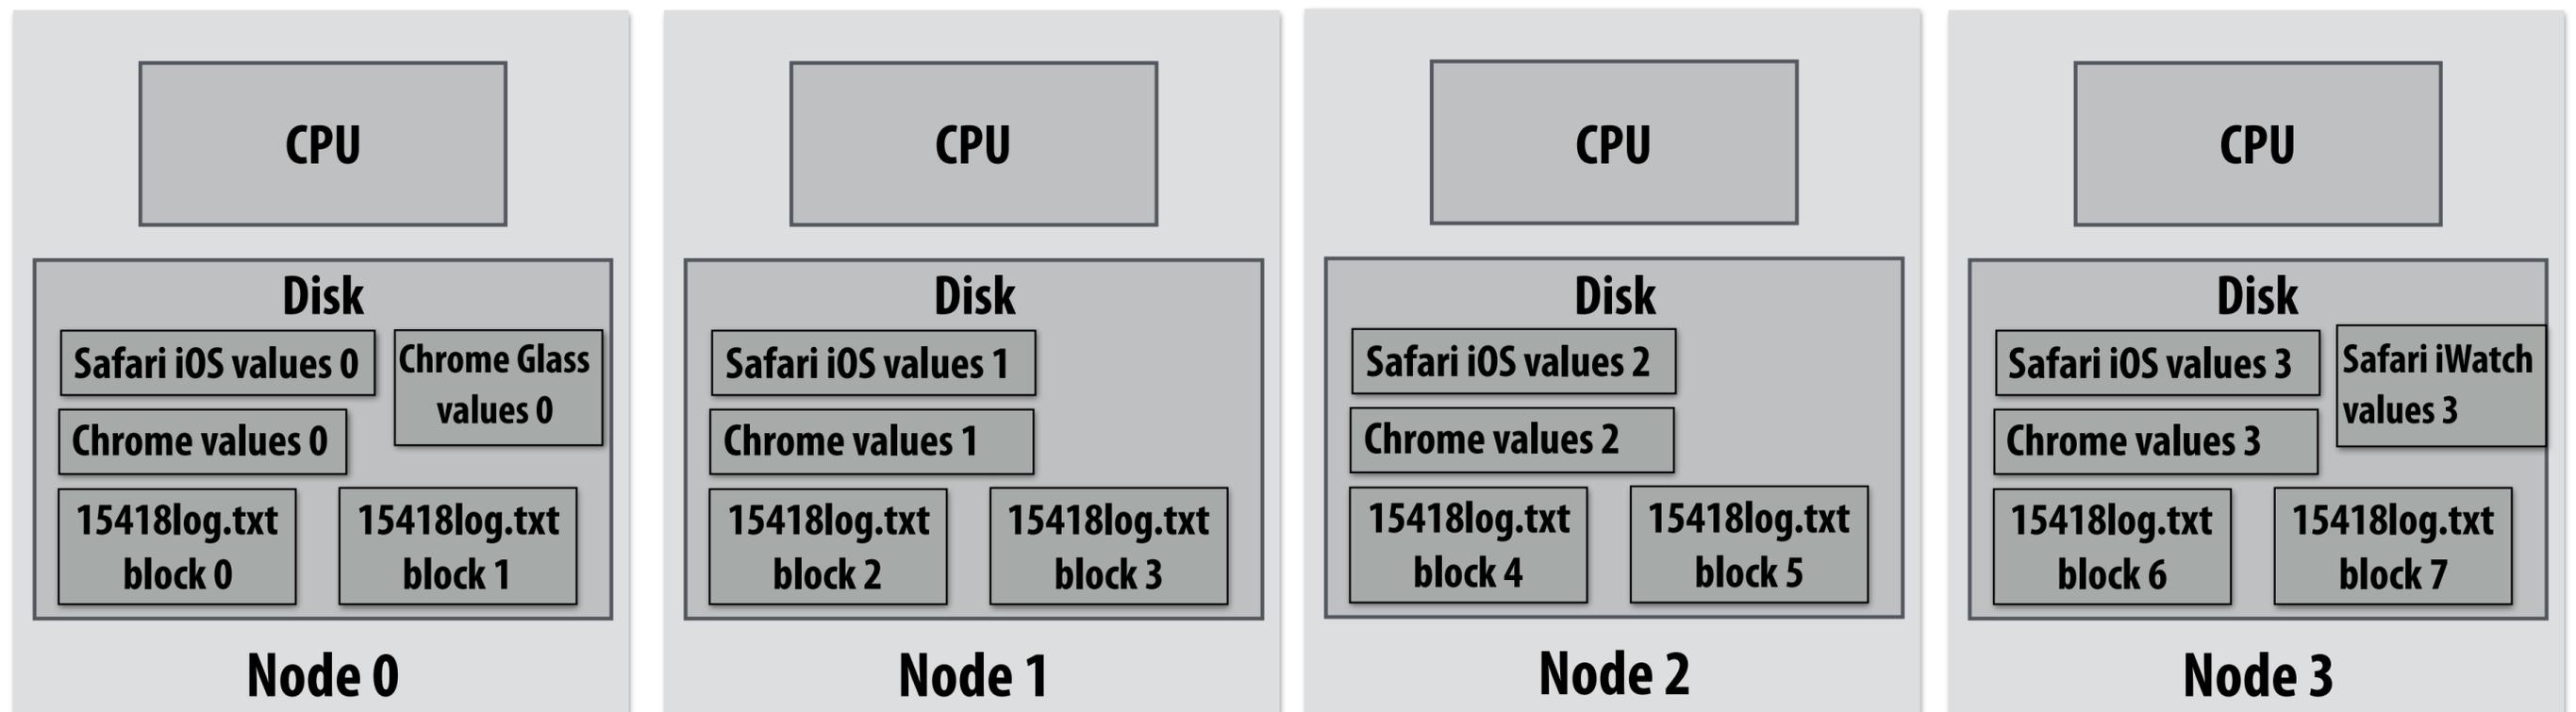

# Steps 2 and 3: gathering data, running the reducer

```
// gather all input data for key, then execute reducer
// to produce final result
void runReducer(string key, reducer, result) {
    list<string> inputs;
    for (n in nodes) {
        filename = get_filename(key, n);
        read lines of filename, append into inputs;
    }
    reducer(key, inputs, result);
}
```

**Step 2: Prepare intermediate data for reducer.**

**Step 3: Run reducer function on all keys.**


**Question: how to assign reducer tasks?**

**Question: how to get all data for key onto the correct worker node?**


**Keys to reduce:**  
(generated by mapper):

Safari iOS
Chrome
Safari iWatch
Chrome Glass

**Example:**  
Assign Safari iOS to Node 0

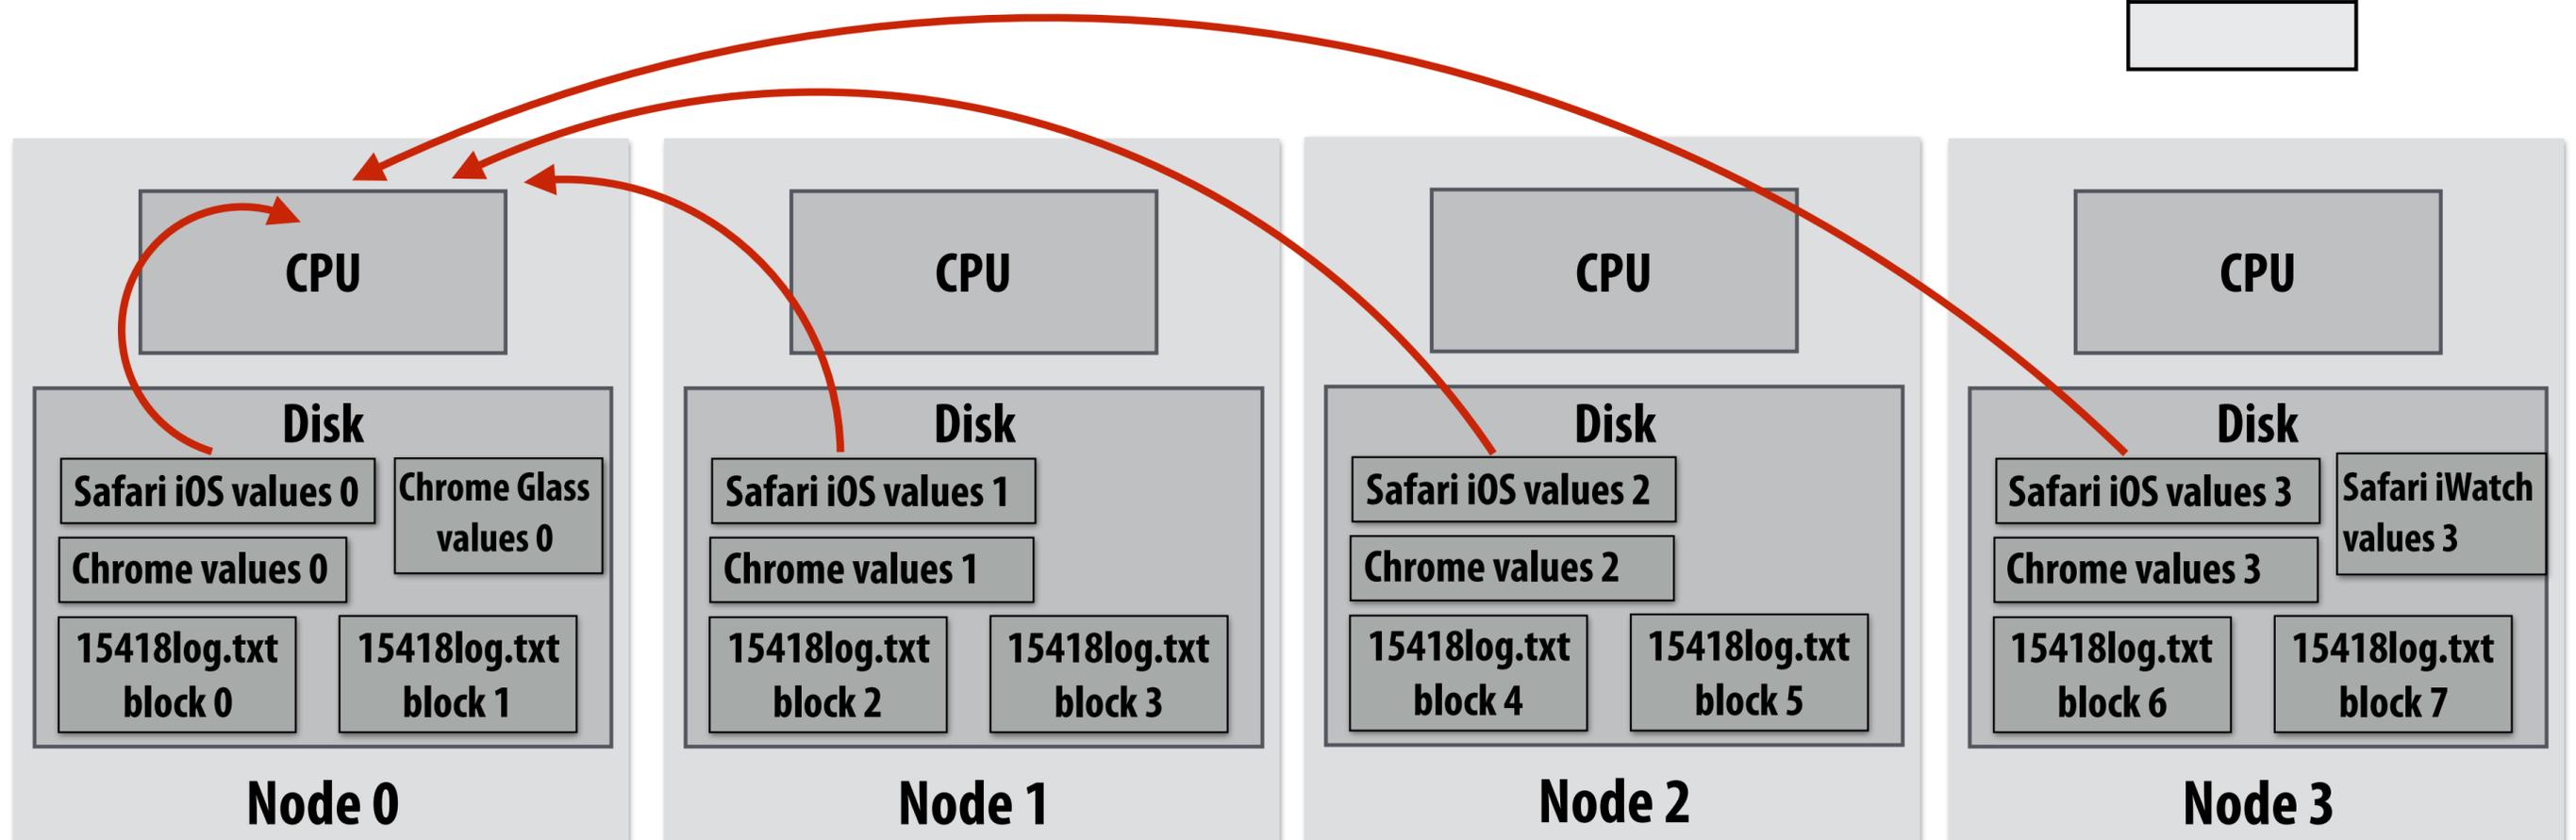

# Additional implementation challenges at scale

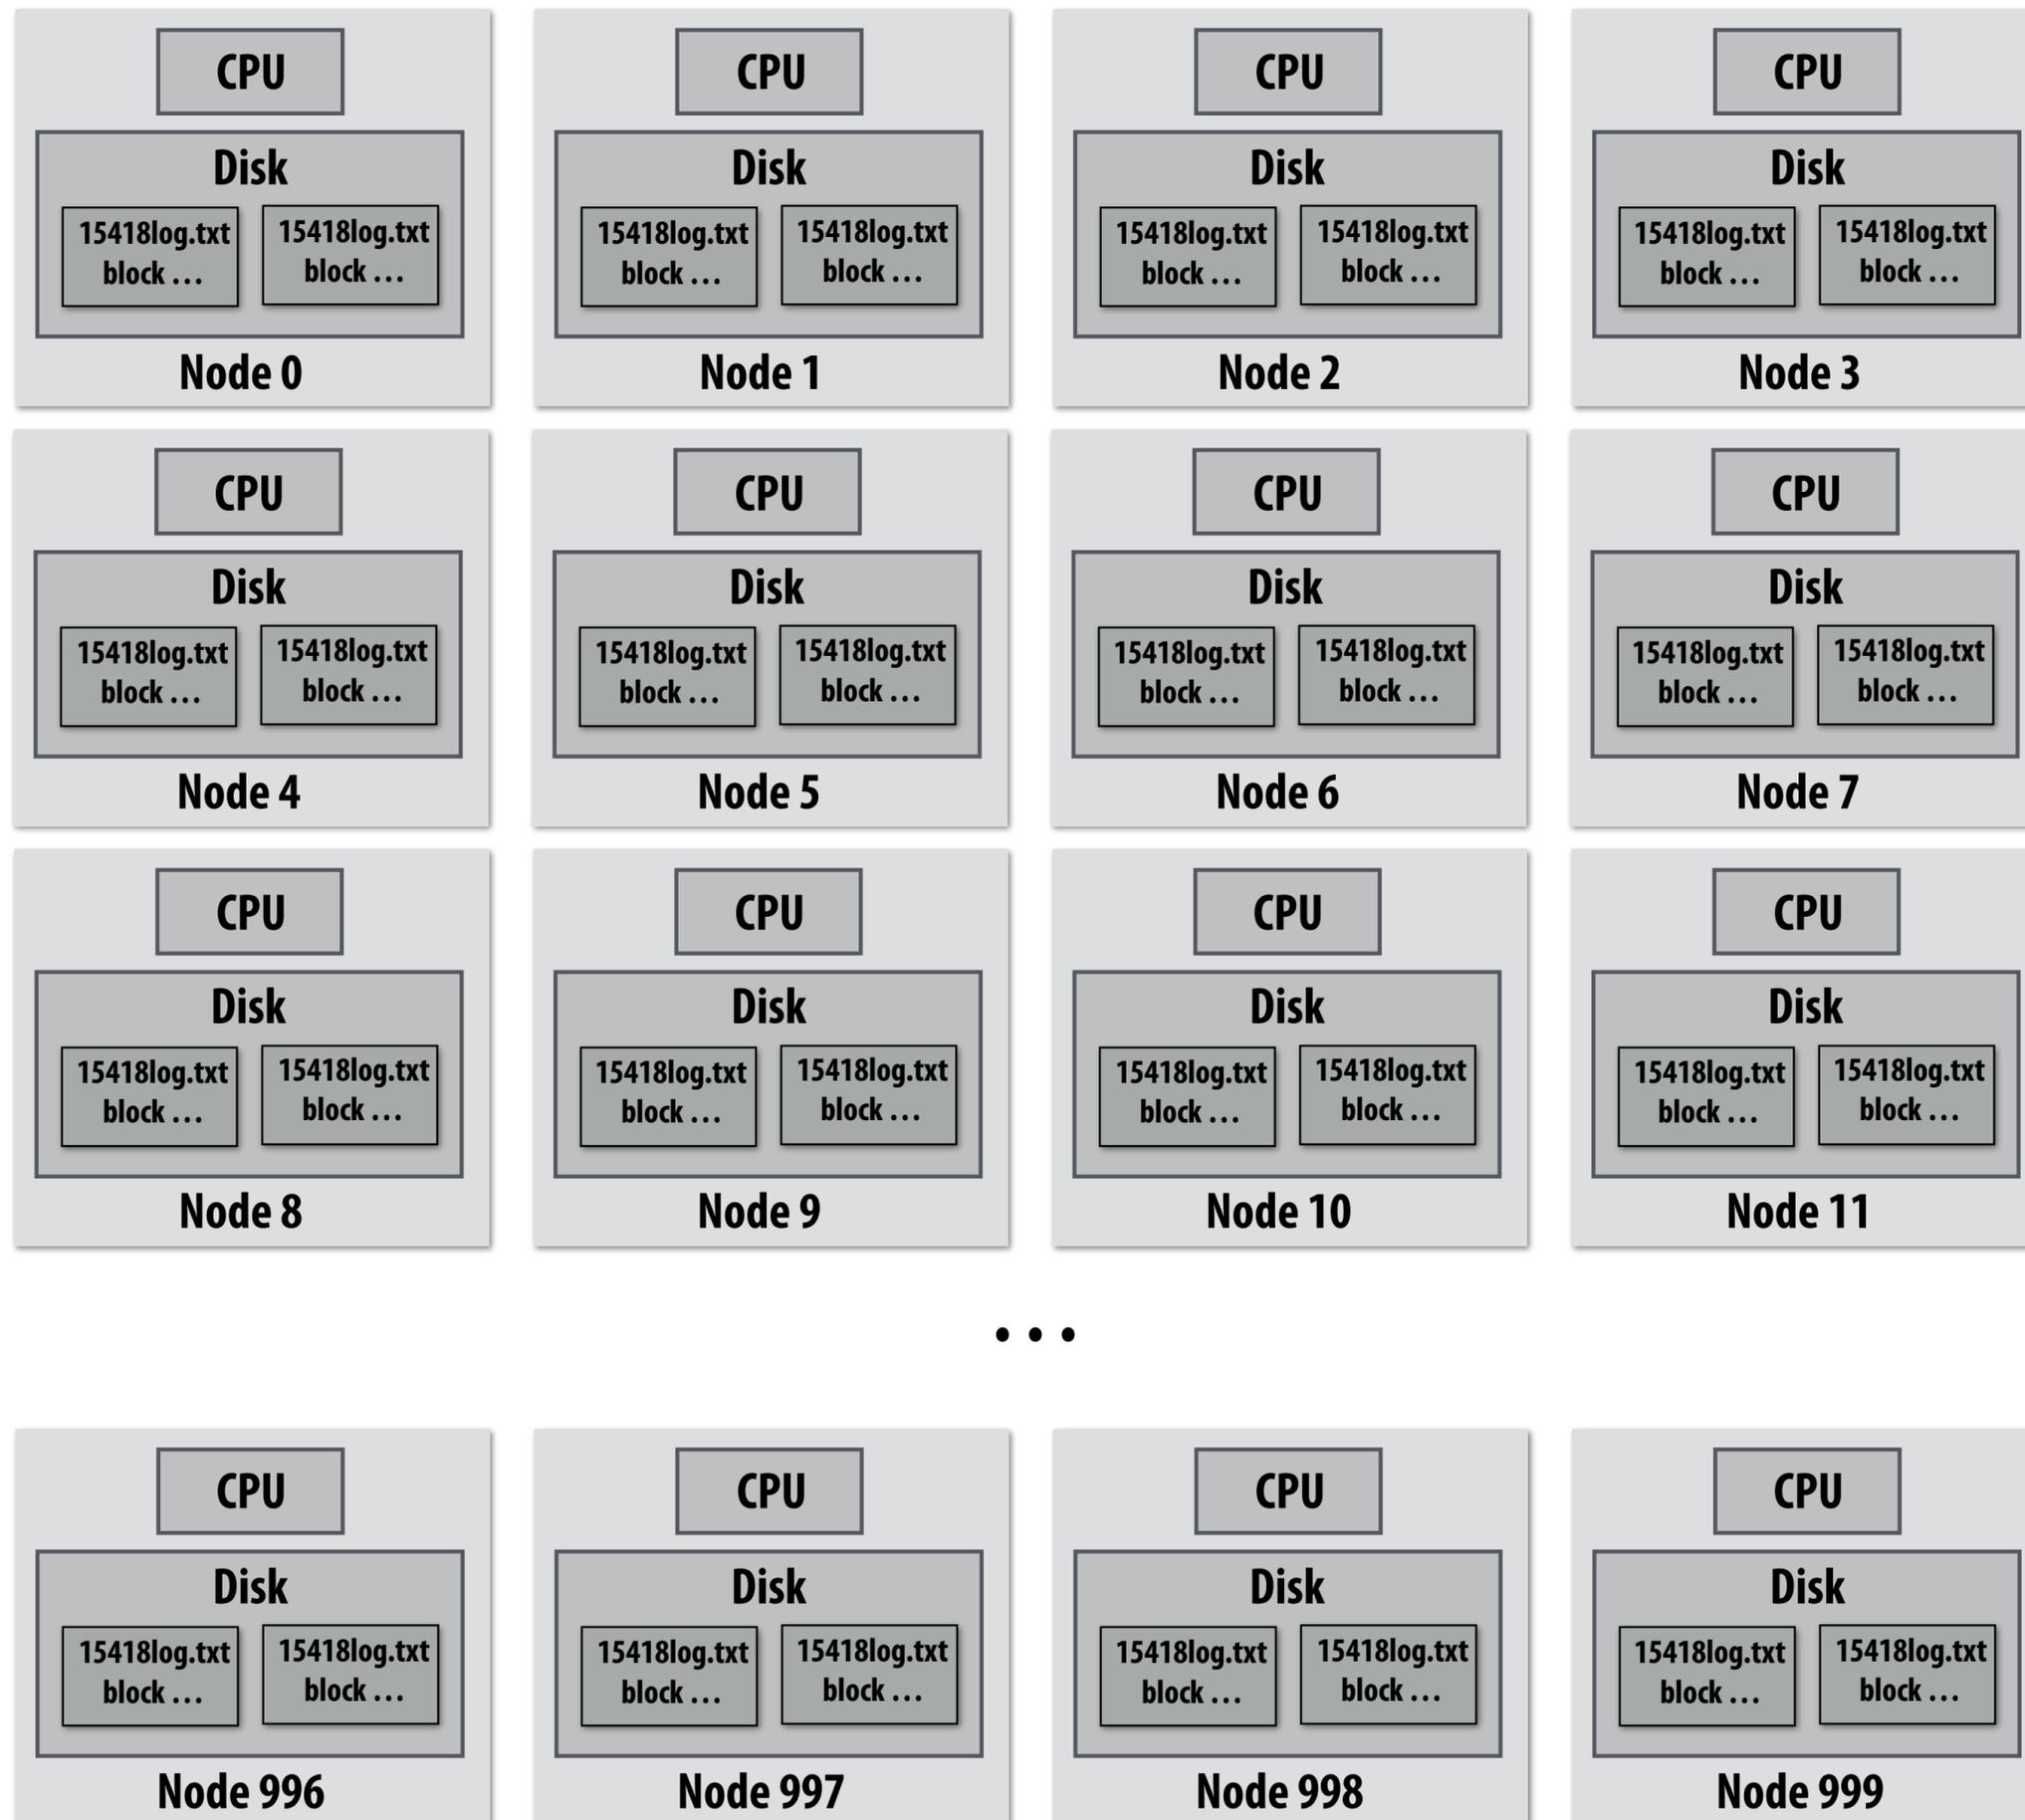

**Nodes may fail during program execution**

**Some nodes may run slower than others**  
(due to different amounts of work, heterogeneity in the cluster, etc..)

# Job scheduler responsibilities

- **Exploit data locality: “move computation to the data”**
  - Run mapper jobs on nodes that contain input files
  - Run reducer jobs on nodes that already have most of data for a certain key
- **Handling node failures**
  - Scheduler detects job failures and reruns job on new machines
    - This is possible since inputs reside in persistent storage (distributed file system)
  - Scheduler duplicates jobs on multiple machines (reduce overall processing latency incurred by node failures)
- **Handling slow machines**
  - Scheduler duplicates jobs on multiple machines

# runMapReduceJob problems?

- **Permits only a very simple program structure**
  - Programs must be structured as: map, followed by reduce by key
  - See DryadLINQ for generalization to DAGs
- **Iterative algorithms must load from disk each iteration**
  - Recall last lecture on graph processing:

```
void pagerank_mapper(graphnode n, map<string,string> results) {
    float val = compute update value for n
    for (dst in outgoing links from n)
        results.add(dst.node, val);
}

void pagerank_reducer(graphnode n, list<float> values, float& result) {
    float sum = 0.0;
    for (v in values)
        sum += v;
    result = sum;
}

for (i = 0 to NUM_ITERATIONS) {
    input = load graph from last iteration
    output = file for this iteration output
    runMapReduceJob(pagerank_mapper, pagerank_reducer, result[i-1], result[i]);
}
```



**in-memory, fault-tolerant distributed computing**

**<http://spark.apache.org/>**

# Goals

- **Programming model for cluster-scale computations where there is significant reuse of intermediate datasets**
  - **Iterative machine learning and graph algorithms**
  - **Interactive data mining: load large dataset into aggregate memory of cluster and then perform multiple ad-hoc queries**
- **Don't want incur inefficiency of writing intermediates to persistent distributed file system (want to keep it in memory)**
  - **Challenge: efficiently implementing fault tolerance for large-scale distributed in-memory computations.**

# Fault tolerance for in-memory calculations

## ■ Replicate all computations

- Expensive solution: decreases peak throughput

## ■ Checkpoint and rollback

- Periodically save state of program to persistent storage
- Restart from last checkpoint on node failure

## ■ Maintain log of updates (commands and data)

- High overhead for maintaining logs

### Recall map-reduce solutions:

- Checkpoints after each map/reduce step by writing results to file system
- Scheduler's list of outstanding (but not yet complete) jobs is a log
- Functional structure of programs allows for restart at granularity of a single mapper or reducer invocation (don't have to restart entire program)

# Resilient distributed dataset (RDD)

## Spark's key programming abstraction:

- Read-only ordered collection of records (immutable)
- RDDs can only be created by deterministic *transformations* on data in persistent storage or on existing RDDs
- *Actions* on RDDs return data to application

RDDs


```
// create RDD from file system data
var lines = spark.textFile("hdfs://15418log.txt");

// create RDD using filter() transformation on lines
var mobileViews = lines.filter((x: String) => isMobileClient(x));

// another filter() transformation
var safariViews = mobileViews.filter((x: String) => x.contains("Safari"));

// then count number of elements in RDD via count() action
var numViews = safariViews.count();
```

↑  
int

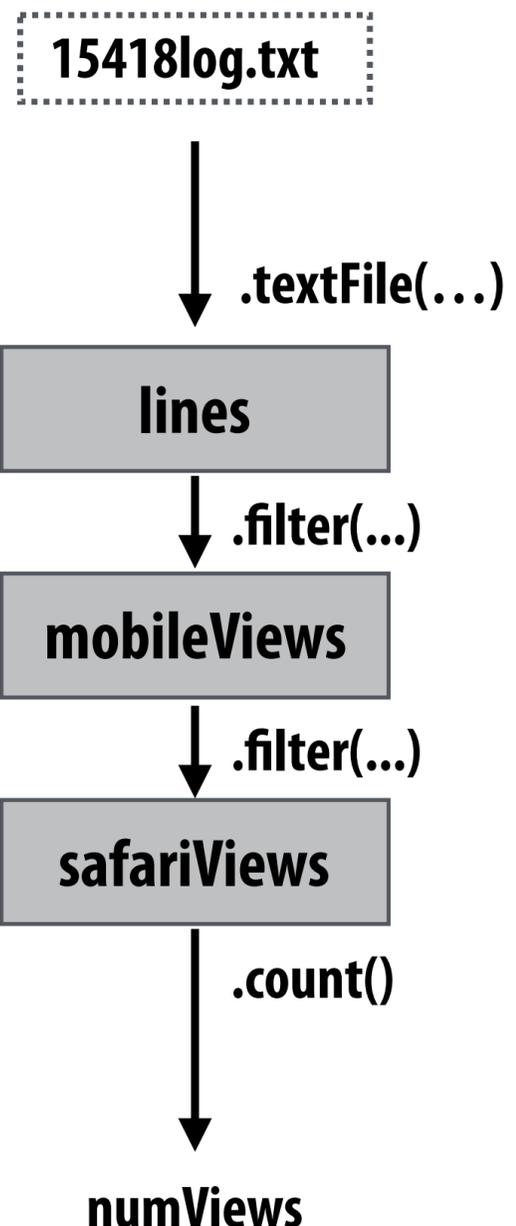


# Repeating the map-reduce example

```
// 1. create RDD from file system data
// 2. create RDD with only lines from mobile clients
// 3. create RDD with elements of type (String,Int) from line string
// 4. group elements by key
// 5. call provided reduction function on all keys to count views
```

```
var perAgentCounts = spark.textFile("hdfs://15418log.txt")
                          .filter(x => isMobileClient(x))
                          .map(x => (parseUserAgent(x),1));
                          .reduceByKey((x,y) => x+y)
                          .collect();
```

↑  
**Array[String,int]**

**"Lineage":**  
Sequence of RDD operations  
needed to compute output

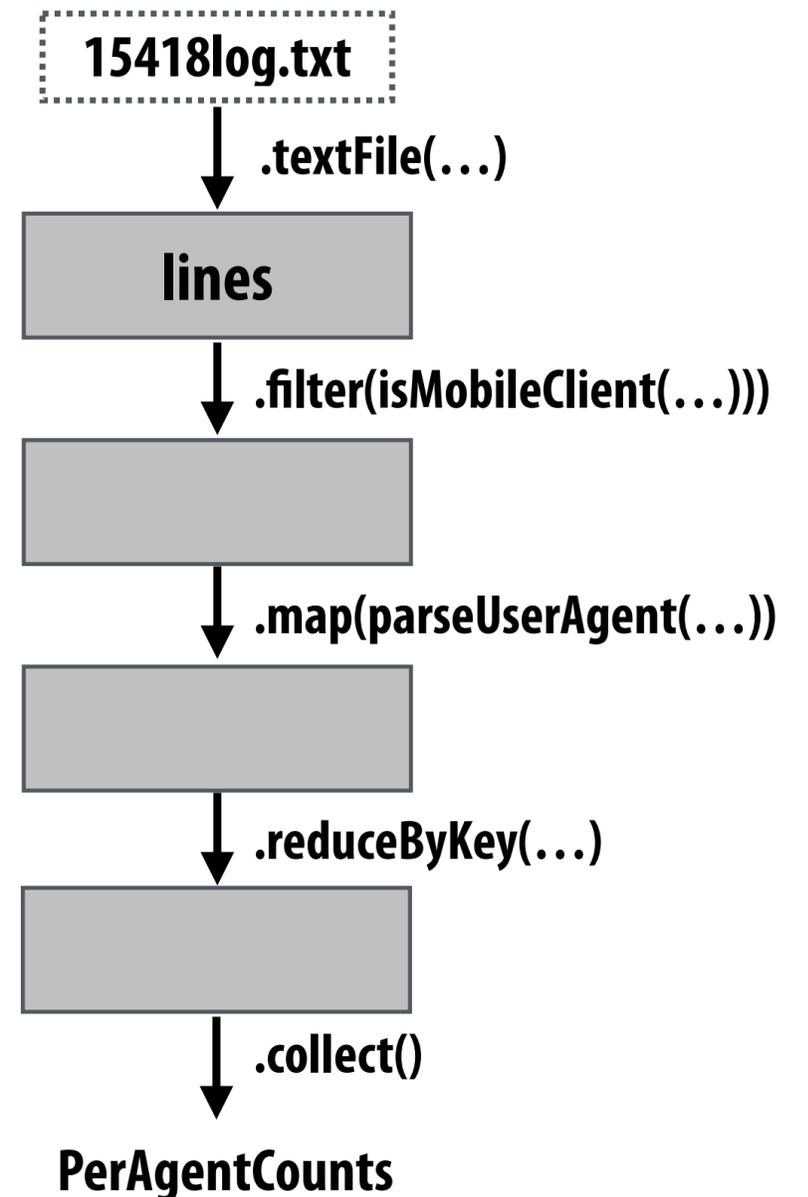

# Another Spark program


```
// create RDD from file system data
var lines = spark.textFile("hdfs://15418log.txt");

// create RDD using filter() transformation on lines
var mobileViews = lines.filter((x: String) => isMobileClient(x));

// instruct Spark runtime to try to keep mobileViews in memory
mobileViews.persist();

// create a new RDD by filtering mobileViews
// then count number of elements in new RDD via count() action
var numViews = mobileViews.filter(_.contains("Safari")).count();

// 1. create new RDD by filtering only Chrome views
// 2. for each element, split string and take timestamp of
//    page view
// 3. convert RDD to a scalar sequence (collect() action)
var timestamps = mobileViews.filter(_.contains("Chrome"))
    .map(_.split(" ")(0))
    .collect();
```

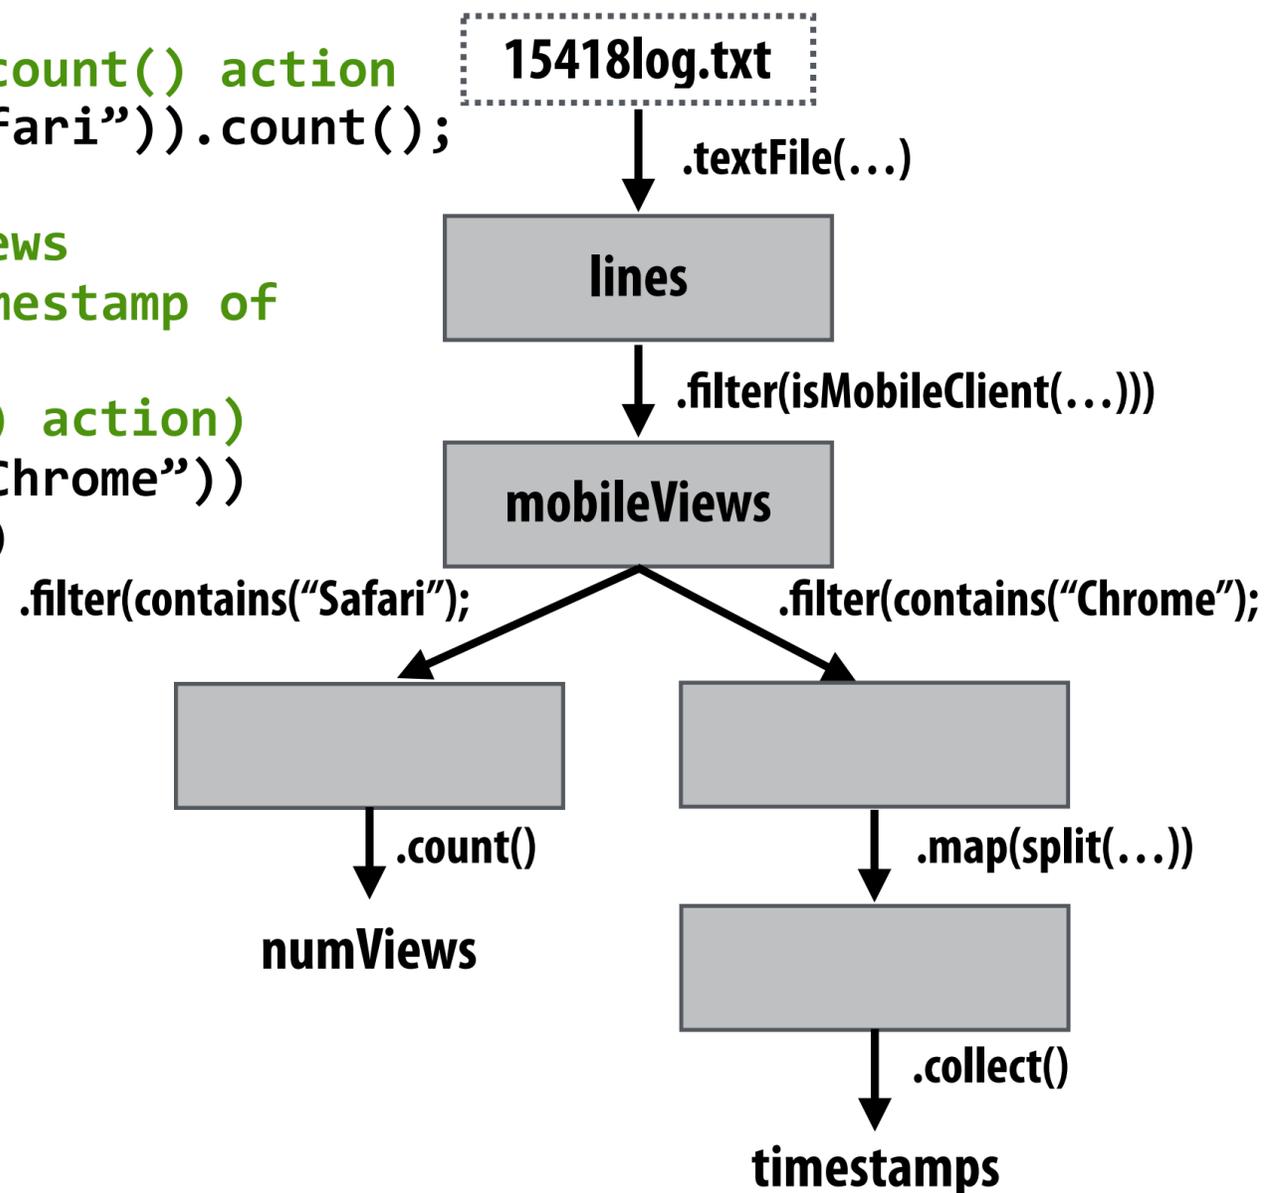

# RDD transformations and actions

## Transformations: (data parallel operators taking an input RDD to a new RDD)

<i>map</i> ( $f : T \Rightarrow U$ )	:	$\text{RDD}[T] \Rightarrow \text{RDD}[U]$
<i>filter</i> ( $f : T \Rightarrow \text{Bool}$ )	:	$\text{RDD}[T] \Rightarrow \text{RDD}[T]$
<i>flatMap</i> ( $f : T \Rightarrow \text{Seq}[U]$ )	:	$\text{RDD}[T] \Rightarrow \text{RDD}[U]$
<i>sample</i> ( $\text{fraction} : \text{Float}$ )	:	$\text{RDD}[T] \Rightarrow \text{RDD}[T]$ (Deterministic sampling)
<i>groupByKey</i> ()	:	$\text{RDD}[(K, V)] \Rightarrow \text{RDD}[(K, \text{Seq}[V])]$
<i>reduceByKey</i> ( $f : (V, V) \Rightarrow V$ )	:	$\text{RDD}[(K, V)] \Rightarrow \text{RDD}[(K, V)]$
<i>union</i> ()	:	$(\text{RDD}[T], \text{RDD}[T]) \Rightarrow \text{RDD}[T]$
<i>join</i> ()	:	$(\text{RDD}[(K, V)], \text{RDD}[(K, W)]) \Rightarrow \text{RDD}[(K, (V, W))]$
<i>cogroup</i> ()	:	$(\text{RDD}[(K, V)], \text{RDD}[(K, W)]) \Rightarrow \text{RDD}[(K, (\text{Seq}[V], \text{Seq}[W]))]$
<i>crossProduct</i> ()	:	$(\text{RDD}[T], \text{RDD}[U]) \Rightarrow \text{RDD}[(T, U)]$
<i>mapValues</i> ( $f : V \Rightarrow W$ )	:	$\text{RDD}[(K, V)] \Rightarrow \text{RDD}[(K, W)]$ (Preserves partitioning)
<i>sort</i> ( $c : \text{Comparator}[K]$ )	:	$\text{RDD}[(K, V)] \Rightarrow \text{RDD}[(K, V)]$
<i>partitionBy</i> ( $p : \text{Partitioner}[K]$ )	:	$\text{RDD}[(K, V)] \Rightarrow \text{RDD}[(K, V)]$

## Actions: (provide data back to the “host” application)


<i>count</i> ()	:	$\text{RDD}[T] \Rightarrow \text{Long}$
<i>collect</i> ()	:	$\text{RDD}[T] \Rightarrow \text{Seq}[T]$
<i>reduce</i> ( $f : (T, T) \Rightarrow T$ )	:	$\text{RDD}[T] \Rightarrow T$
<i>lookup</i> ( $k : K$ )	:	$\text{RDD}[(K, V)] \Rightarrow \text{Seq}[V]$ (On hash/range partitioned RDDs)
<i>save</i> ( $\text{path} : \text{String}$ )	:	Outputs RDD to a storage system, <i>e.g.</i> , HDFS

# How do we implement RDDs?

In particular, how should they be stored?

```
var lines = spark.textFile("hdfs://15418log.txt");  
var lower = lines.map(_.toLowerCase());  
var mobileViews = lower.filter(x => isMobileClient(x));  
var howMany = mobileViews.count();
```

**Question: should we think of RDD's like arrays?**

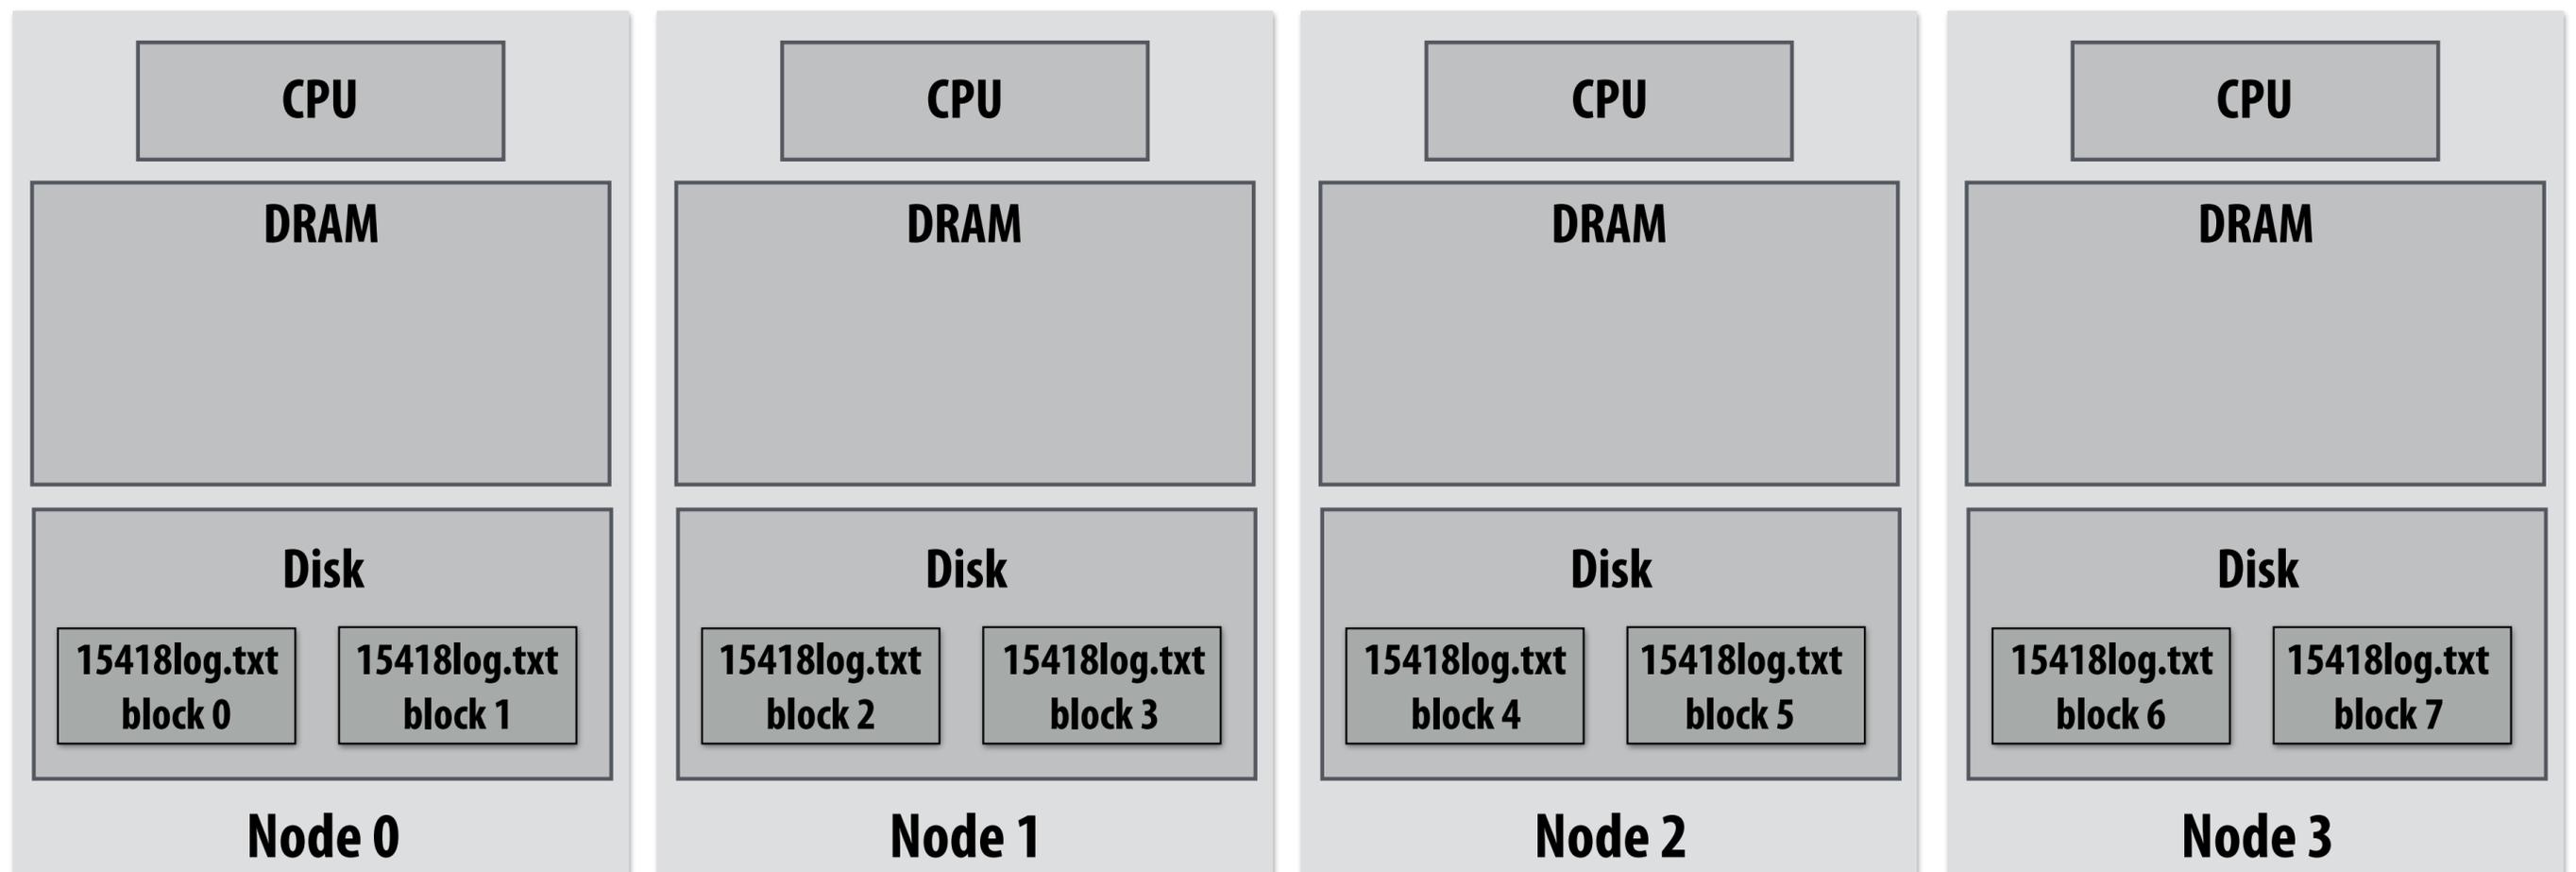


# How do we implement RDDs?

In particular, how should they be stored?


```
var lines = spark.textFile("hdfs://15418log.txt");  
var lower = lines.map(_.toLowerCase());  
var mobileViews = lower.filter(x => isMobileClient(x));  
var howMany = mobileViews.count();
```

**In-memory representation would be huge! (larger than original file on disk)**

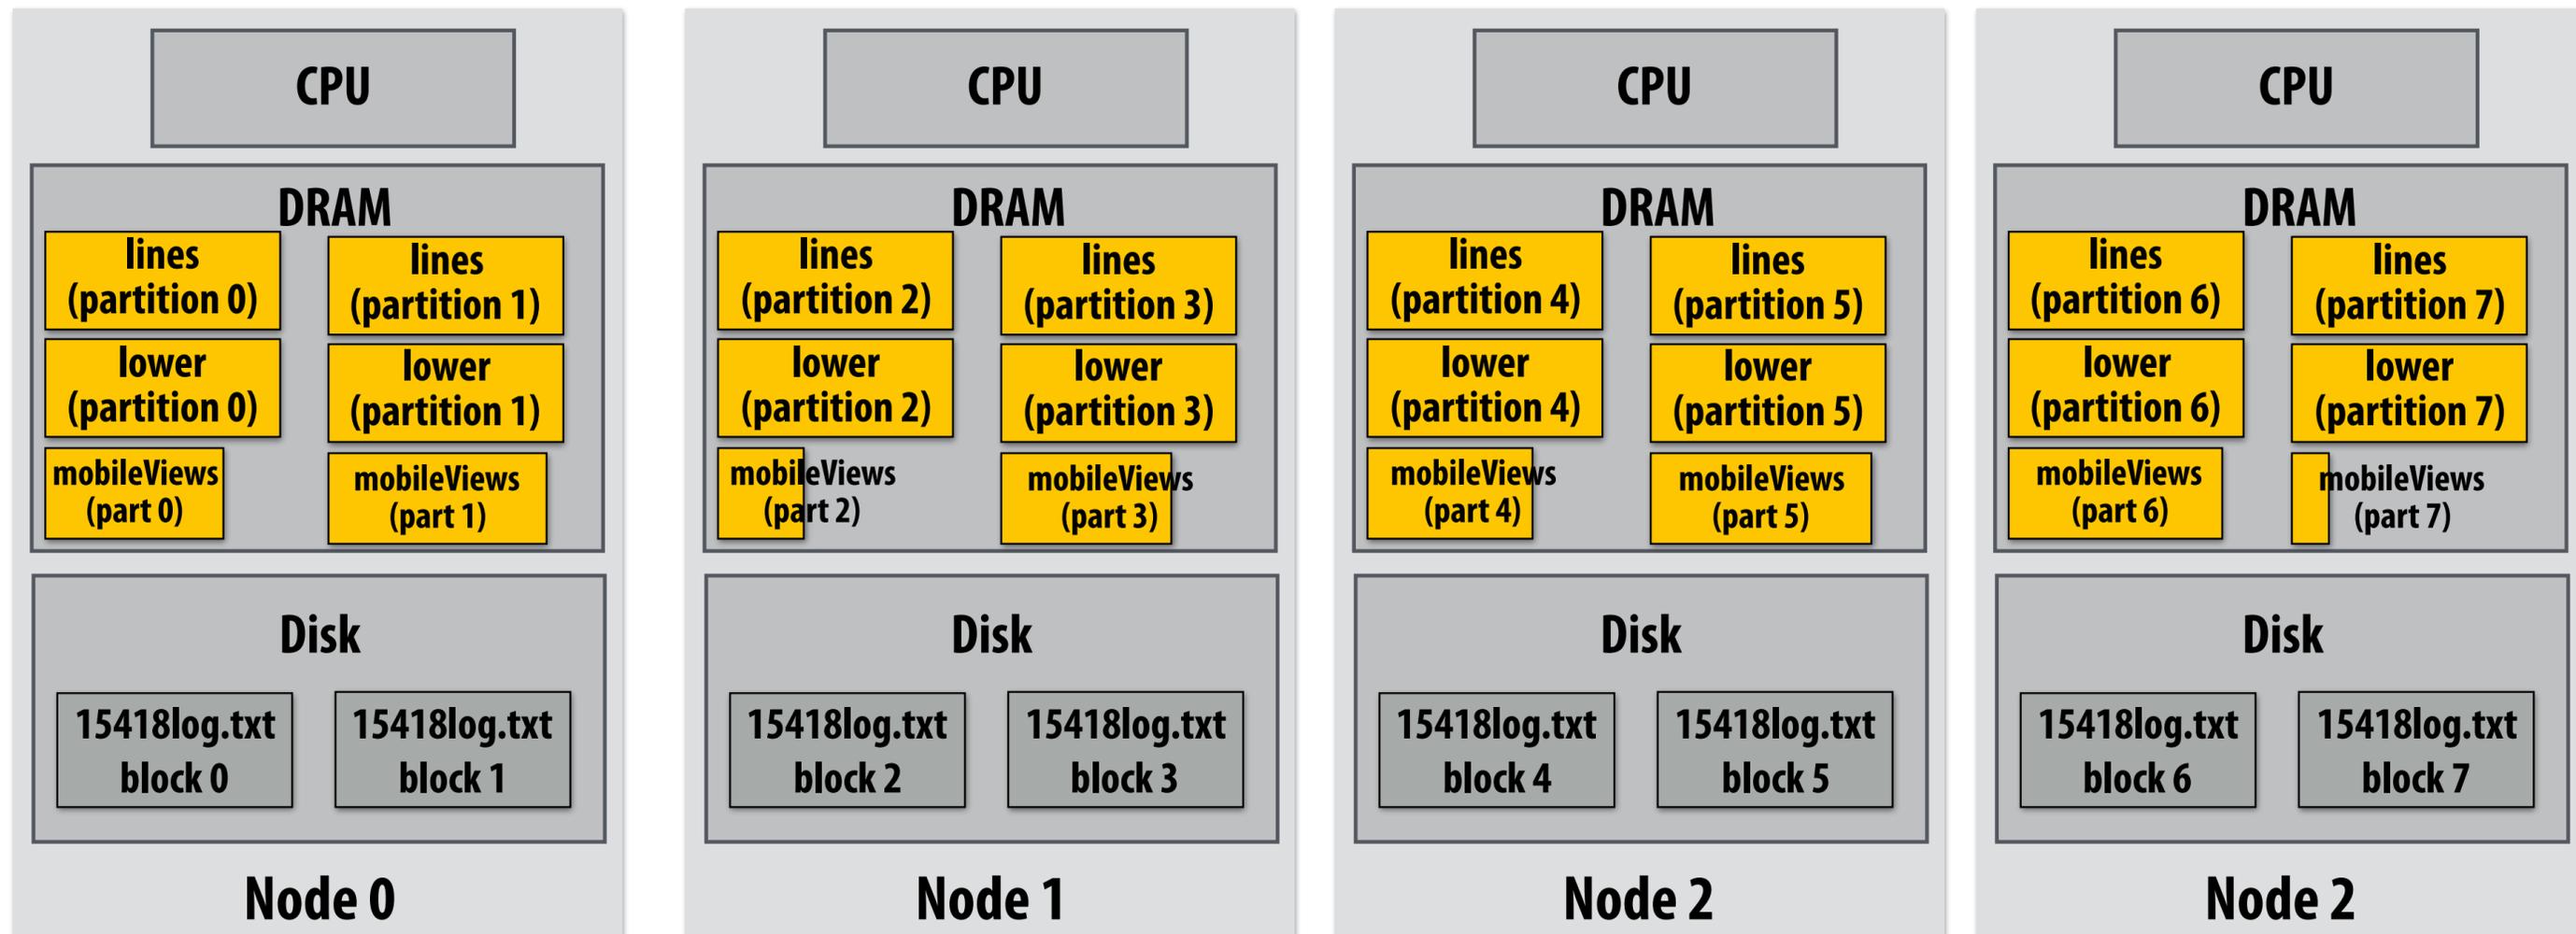

# RDD partitioning and dependencies

```
var lines = spark.textFile("hdfs://15418log.txt");  
var lower = lines.map(_.toLowerCase());  
var mobileViews = lower.filter(x => isMobileClient(x));  
var howMany = mobileViews.count();
```

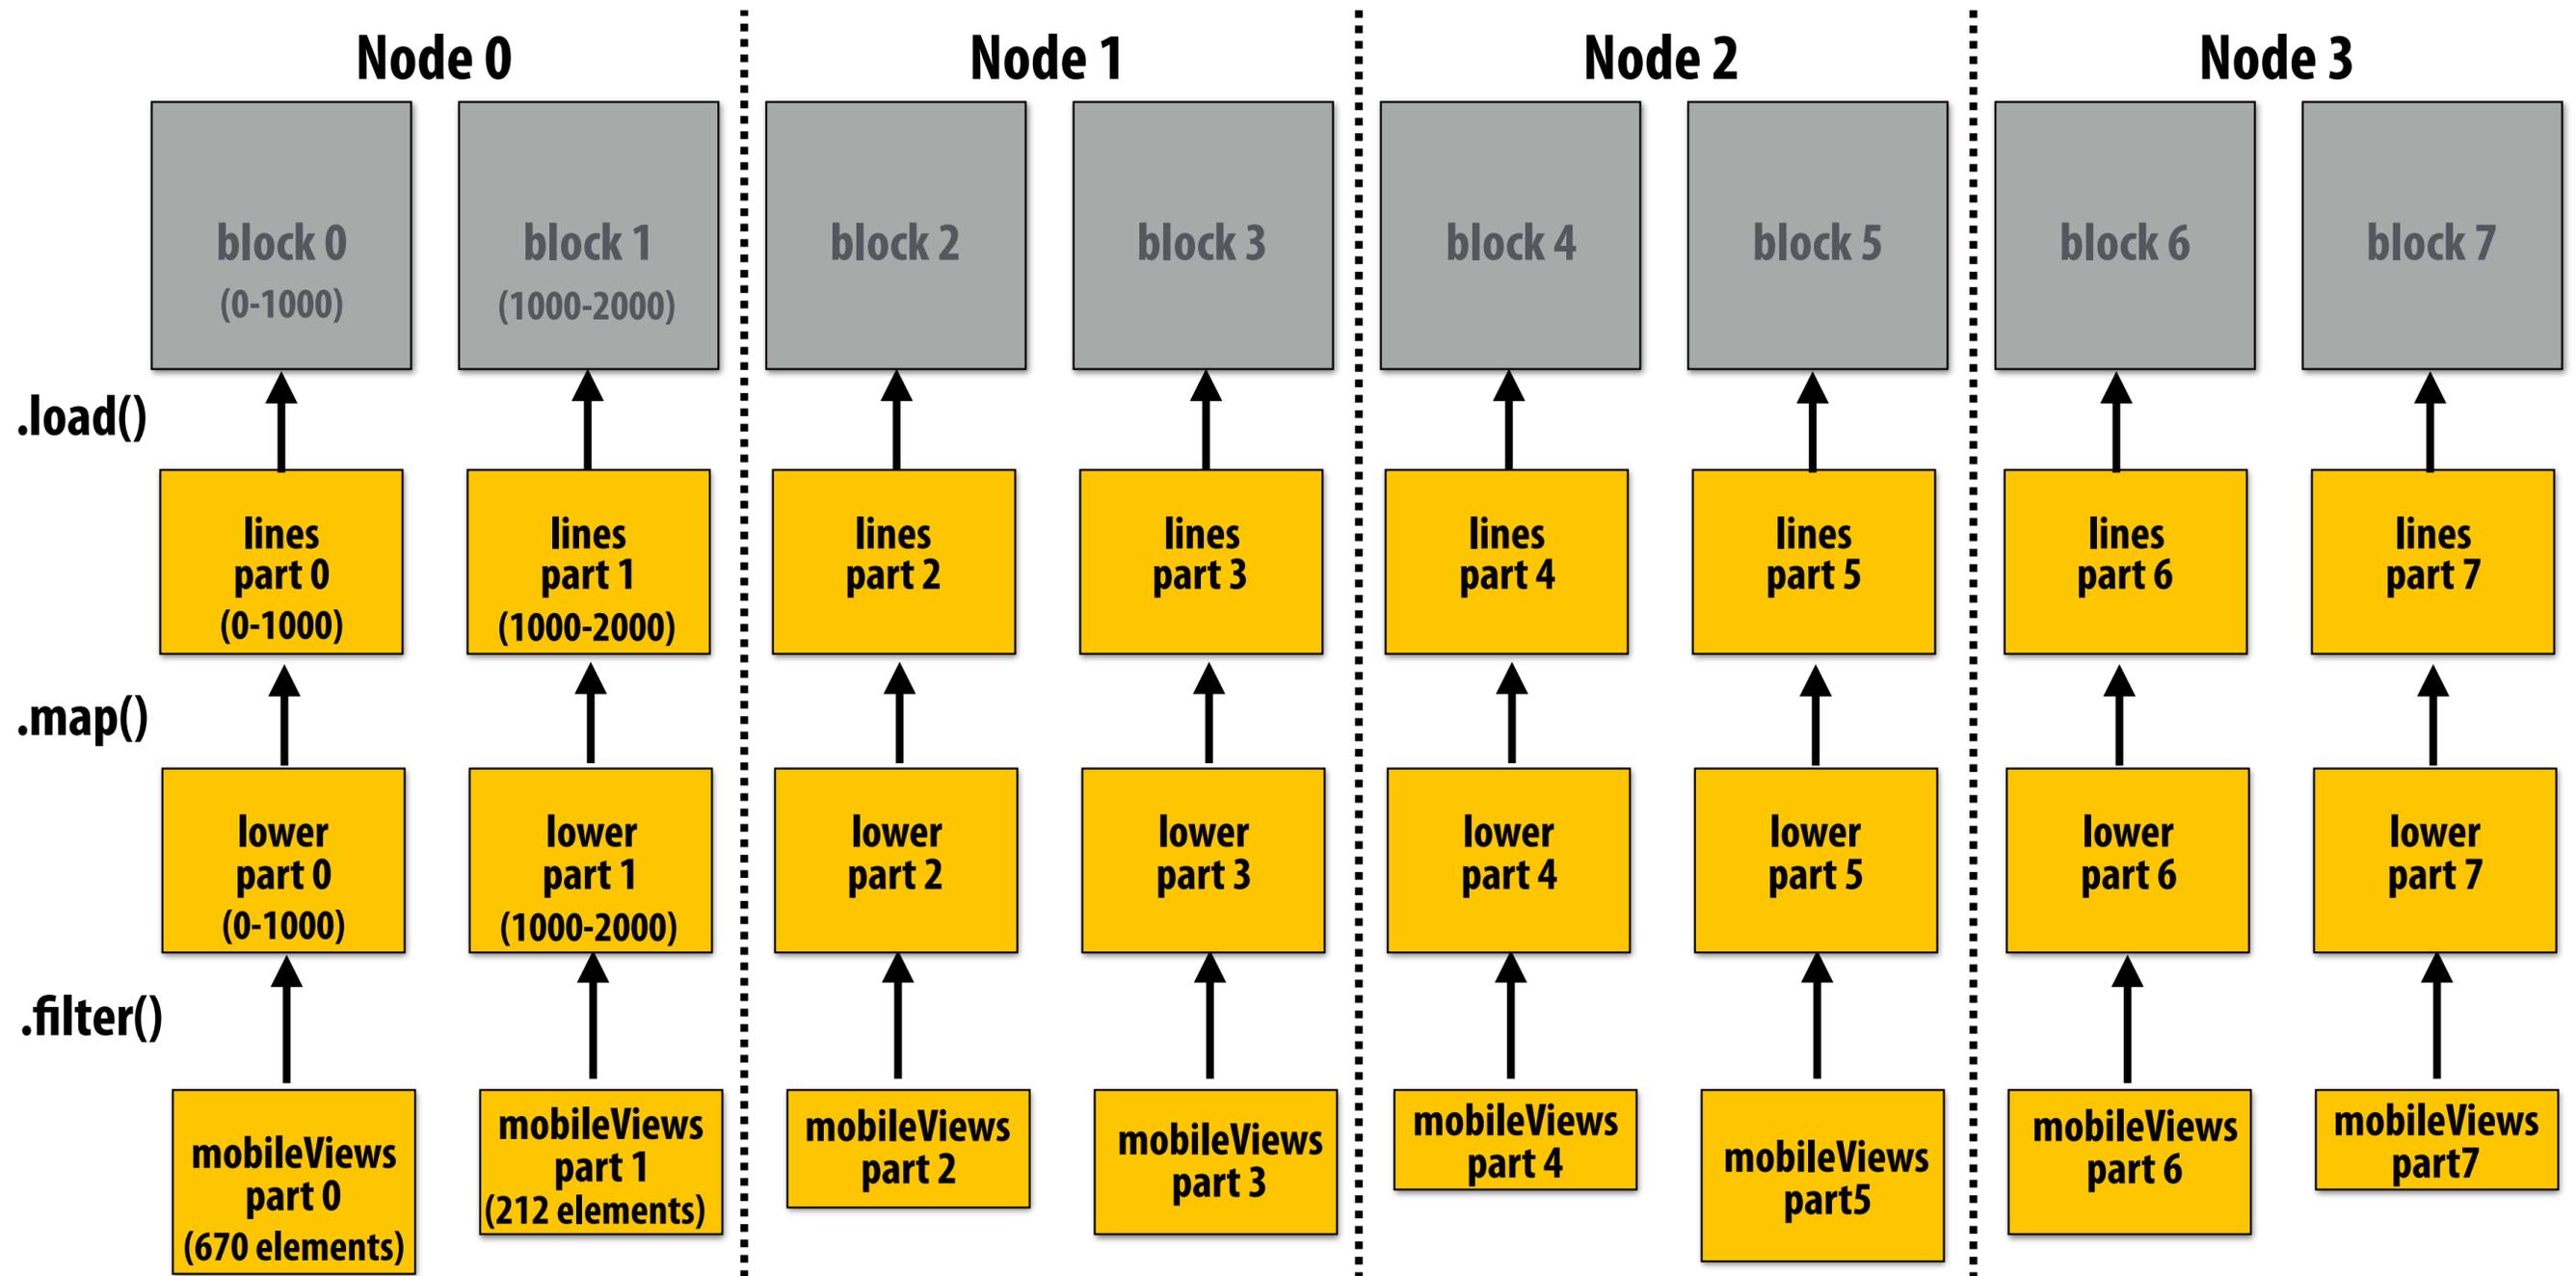

Black lines show dependencies between RDD partitions.

# Implementing sequence of RDD ops efficiently

```
var lines = spark.textFile("hdfs://15418log.txt");
var lower = lines.map(_.toLowerCase());
var mobileViews = lower.filter(x => isMobileClient(x));
var howMany = mobileViews.count();
```

---

**Recall “loop fusion” examples from opening slides of lecture**

**The following code stores only a line of the log file in memory, and only reads input data from disk once (“streaming” solution)**

```
int count = 0;
while (inputFile.eof()) {
    string line = inputFile.readLine();
    string lower = line.toLowerCase();
    if (isMobileClient(lower))
        count++;
}
```

# A simple interface for RDDs

```
var lines = spark.textFile("hdfs://15418log.txt");
var lower = lines.map(_.toLowerCase());
var mobileViews = lower.filter(x => isMobileClient(x));
var howMany = mobileViews.count();
```

---

```
// create RDD by mapping map_func onto
input (parent) RDD
RDD::map(RDD parent, map_func) {
    return new RDDFromMap(parent, map_func);
}

// create RDD by filtering input (parent) RDD
RDD::filter(RDD parent, filter_func) {
    return new RDDFromFilter(parent, filter_func);
}

// create RDD from text file on disk
RDD::textFile(string filename) {
    return new RDDFromTextFile(open(filename));
}

// count action (forces evaluation of RDD)
RDD::count() {
    int count = 0;
    while (hasMoreElements()) {
        var el = next();
        count++;
    }
}
```

```
RDD::hasMoreElements() {
    parent.hasMoreElements();
}

// overloaded since no parent exists
RDDFromTextFile::hasMoreElements() {
    return !inputFile.eof();
}

RDDFromTextFile::next() {
    return inputFile.readLine();
}

RDDFromMap::next() {
    var el = parent.next();
    return map_func(el);
}


RDDFromFilter::next() {
    while (parent.hasMoreElements()) {
        var el = parent.next();
        if (filter_func(el))
            return el;
    }
}
```

# Narrow dependencies

```
var lines = spark.textFile("hdfs://15418log.txt");
var lower = lines.map(_.toLowerCase());
var mobileViews = lower.filter(x => isMobileClient(x));
var howMany = mobileViews.count();
```

**“Narrow dependencies” = each partition of parent RDD referenced by at most one child RDD partition**


- **Allows for fusing of operations (here: can apply map and then filter all at once on input element)**
- **In this example: no communication between nodes of cluster (communication of one int at end to perform count() reduction)**

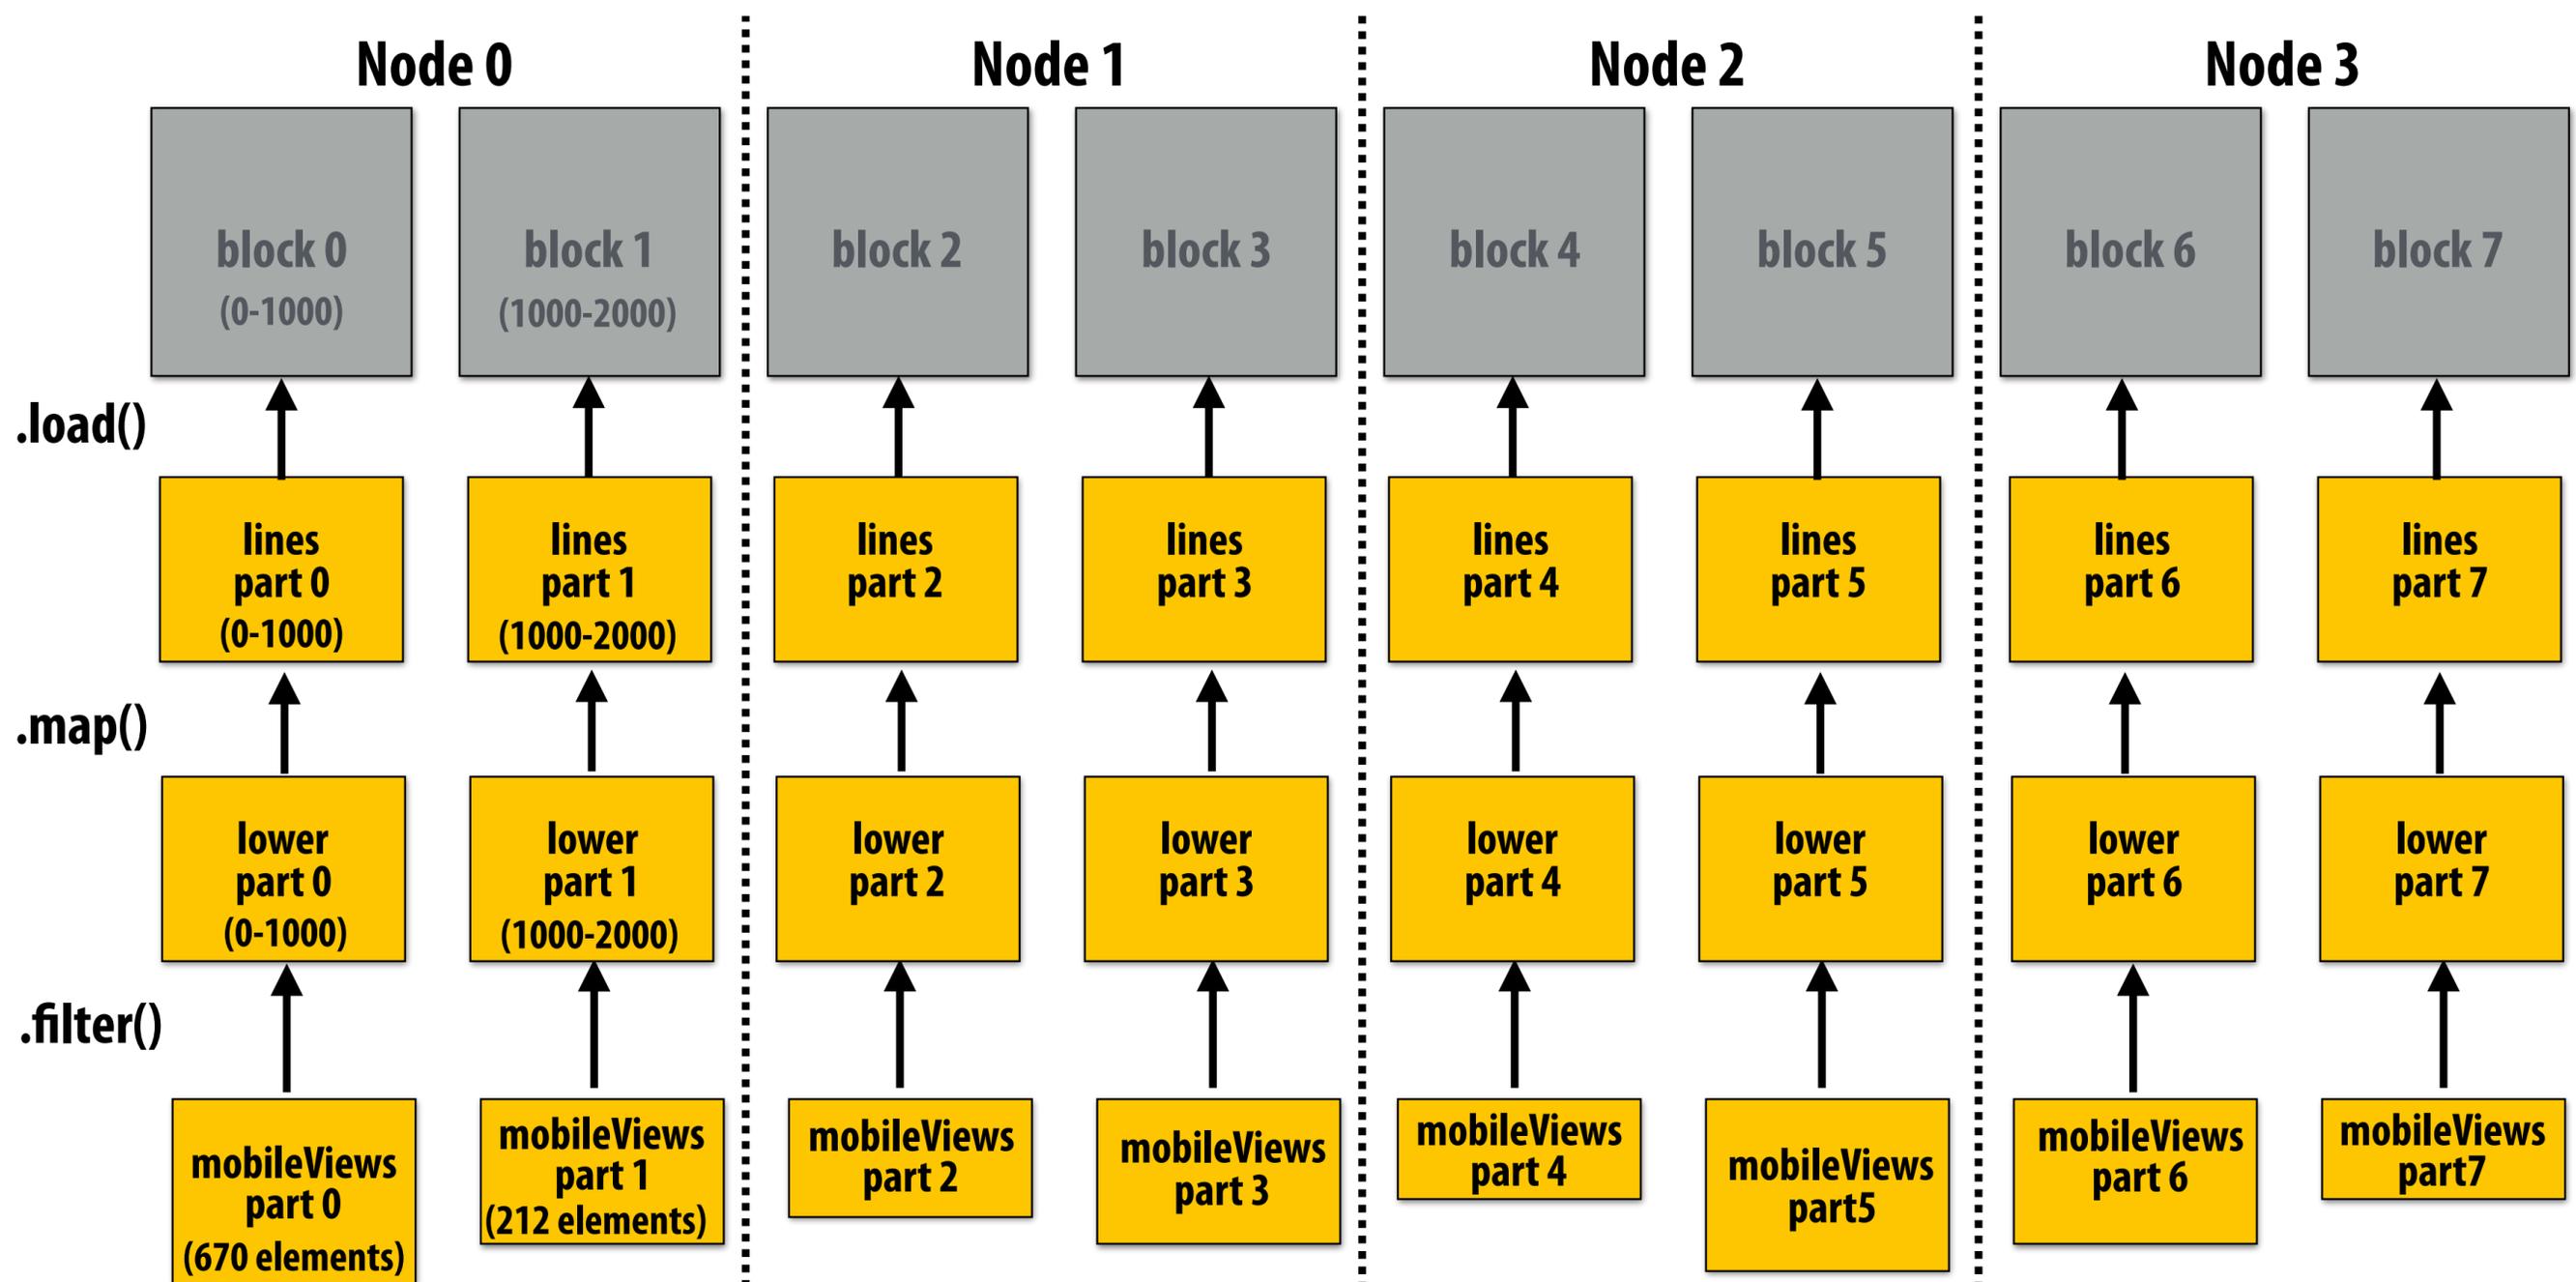

# Wide dependencies

`groupByKey: RDD[(K,V)] → RDD[(K,Seq[V])]`

“Make a new RDD where each element is a sequence containing all values from the parent RDD with the same key.”

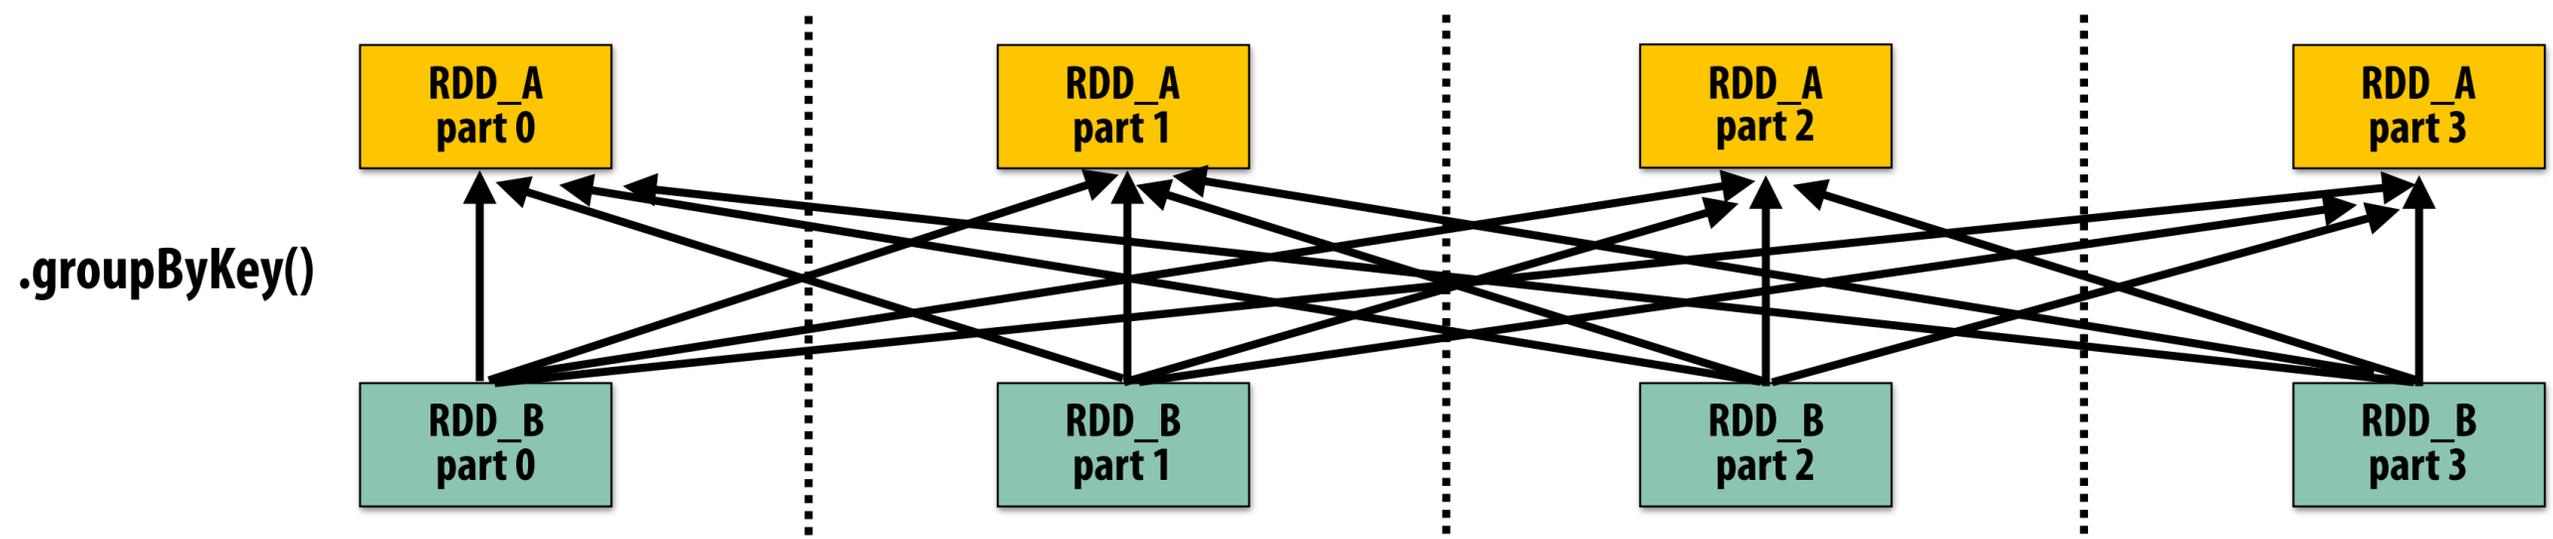


- **Wide dependencies = each partition of parent RDD referenced by multiple child RDD partitions**
- **Challenges:**
  - **Must compute all of `RDD_A` before computing `RDD_B`**
    - **Example: `groupByKey()` may induce all-to-all communication as shown above**
  - **May trigger significant recomputation of ancestor lineage upon node failure**  
(I will address resilience in a few slides)

# Cost of operations depends on partitioning


join:  $RDD[(K,V)], RDD[(K,W)] \rightarrow RDD[(K,(V,W))]$

Assume data in RDD\_A and RDD\_B are partitioned by key: hash username to partition id

**RDD\_A and RDD\_B have different hash partitions: join creates wide dependencies**

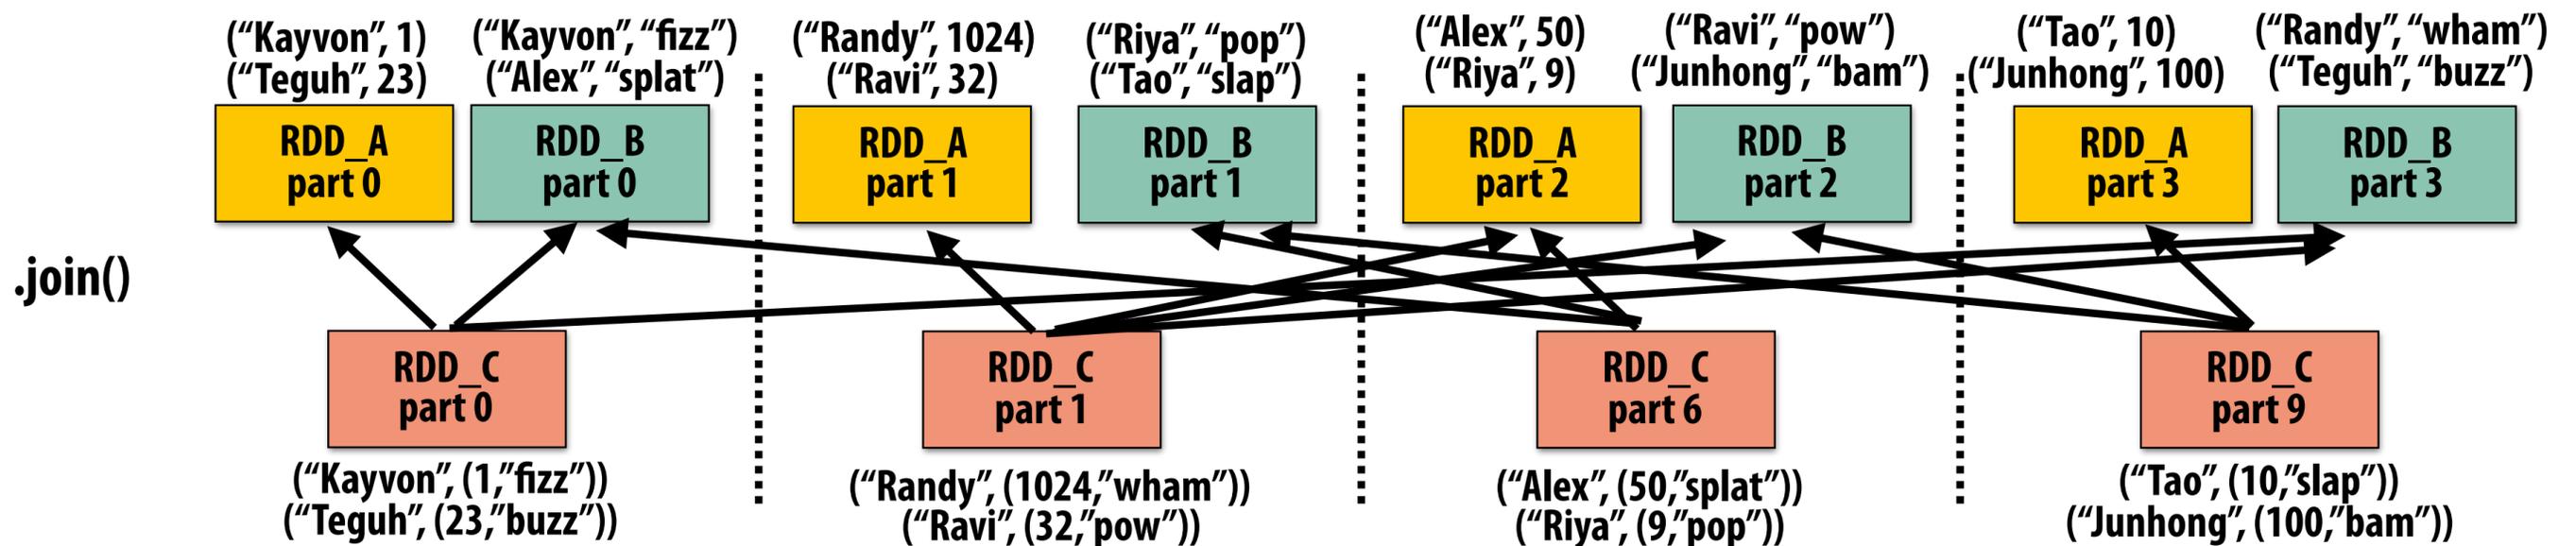

**RDD\_A and RDD\_B have same hash partition: join only creates narrow dependencies**

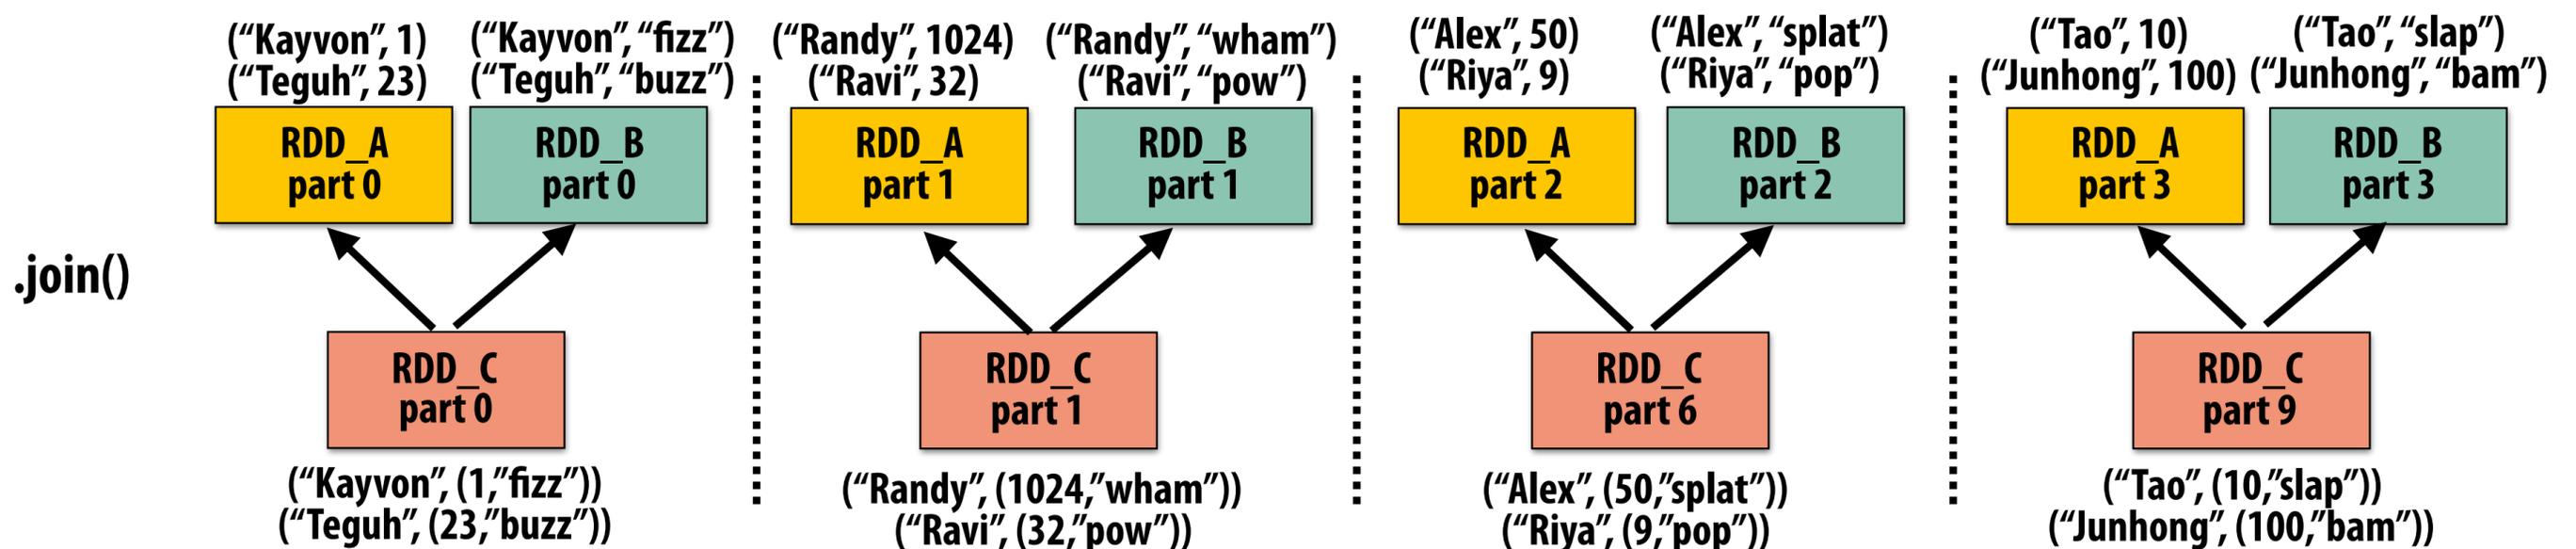

# PartitionBy() transformation

## ■ Inform Spark on how to partition an RDD

- e.g., HashPartitioner, RangePartitioner

```
// create RDD from file system data
var lines = spark.textFile("hdfs://15418log.txt");
var clientInfo = spark.textFile("hdfs://clientssupported.txt"); // (useragent, "yes"/"no")

// create RDD using filter() transformation on lines
var mobileViews = lines.filter(x => isMobileClient(x)).map(x => parseUserAgent(x));

// HashPartitioner maps keys to integers
var partitioner = spark.HashPartitioner(100);


// inform Spark of partition
// .persist() also instructs Spark to try to keep dataset in memory
var mobileViewPartitioned = mobileViews.partitionBy(partitioner)
    .persist();
var clientInfoPartitioned = clientInfo.partitionBy(partitioner)
    .persist();

// join useragents with whether they are supported or not supported
// Note: this join only creates narrow dependencies due to the explicit partitioning above
void joined = mobileViewPartitioned.join(clientInfoPartitioned);
```

## ■ .persist():

- Inform Spark this RDD's contents should be retained in memory
- .persist(RELIABLE) = store contents in durable storage (like a checkpoint)

# Scheduling Spark computations

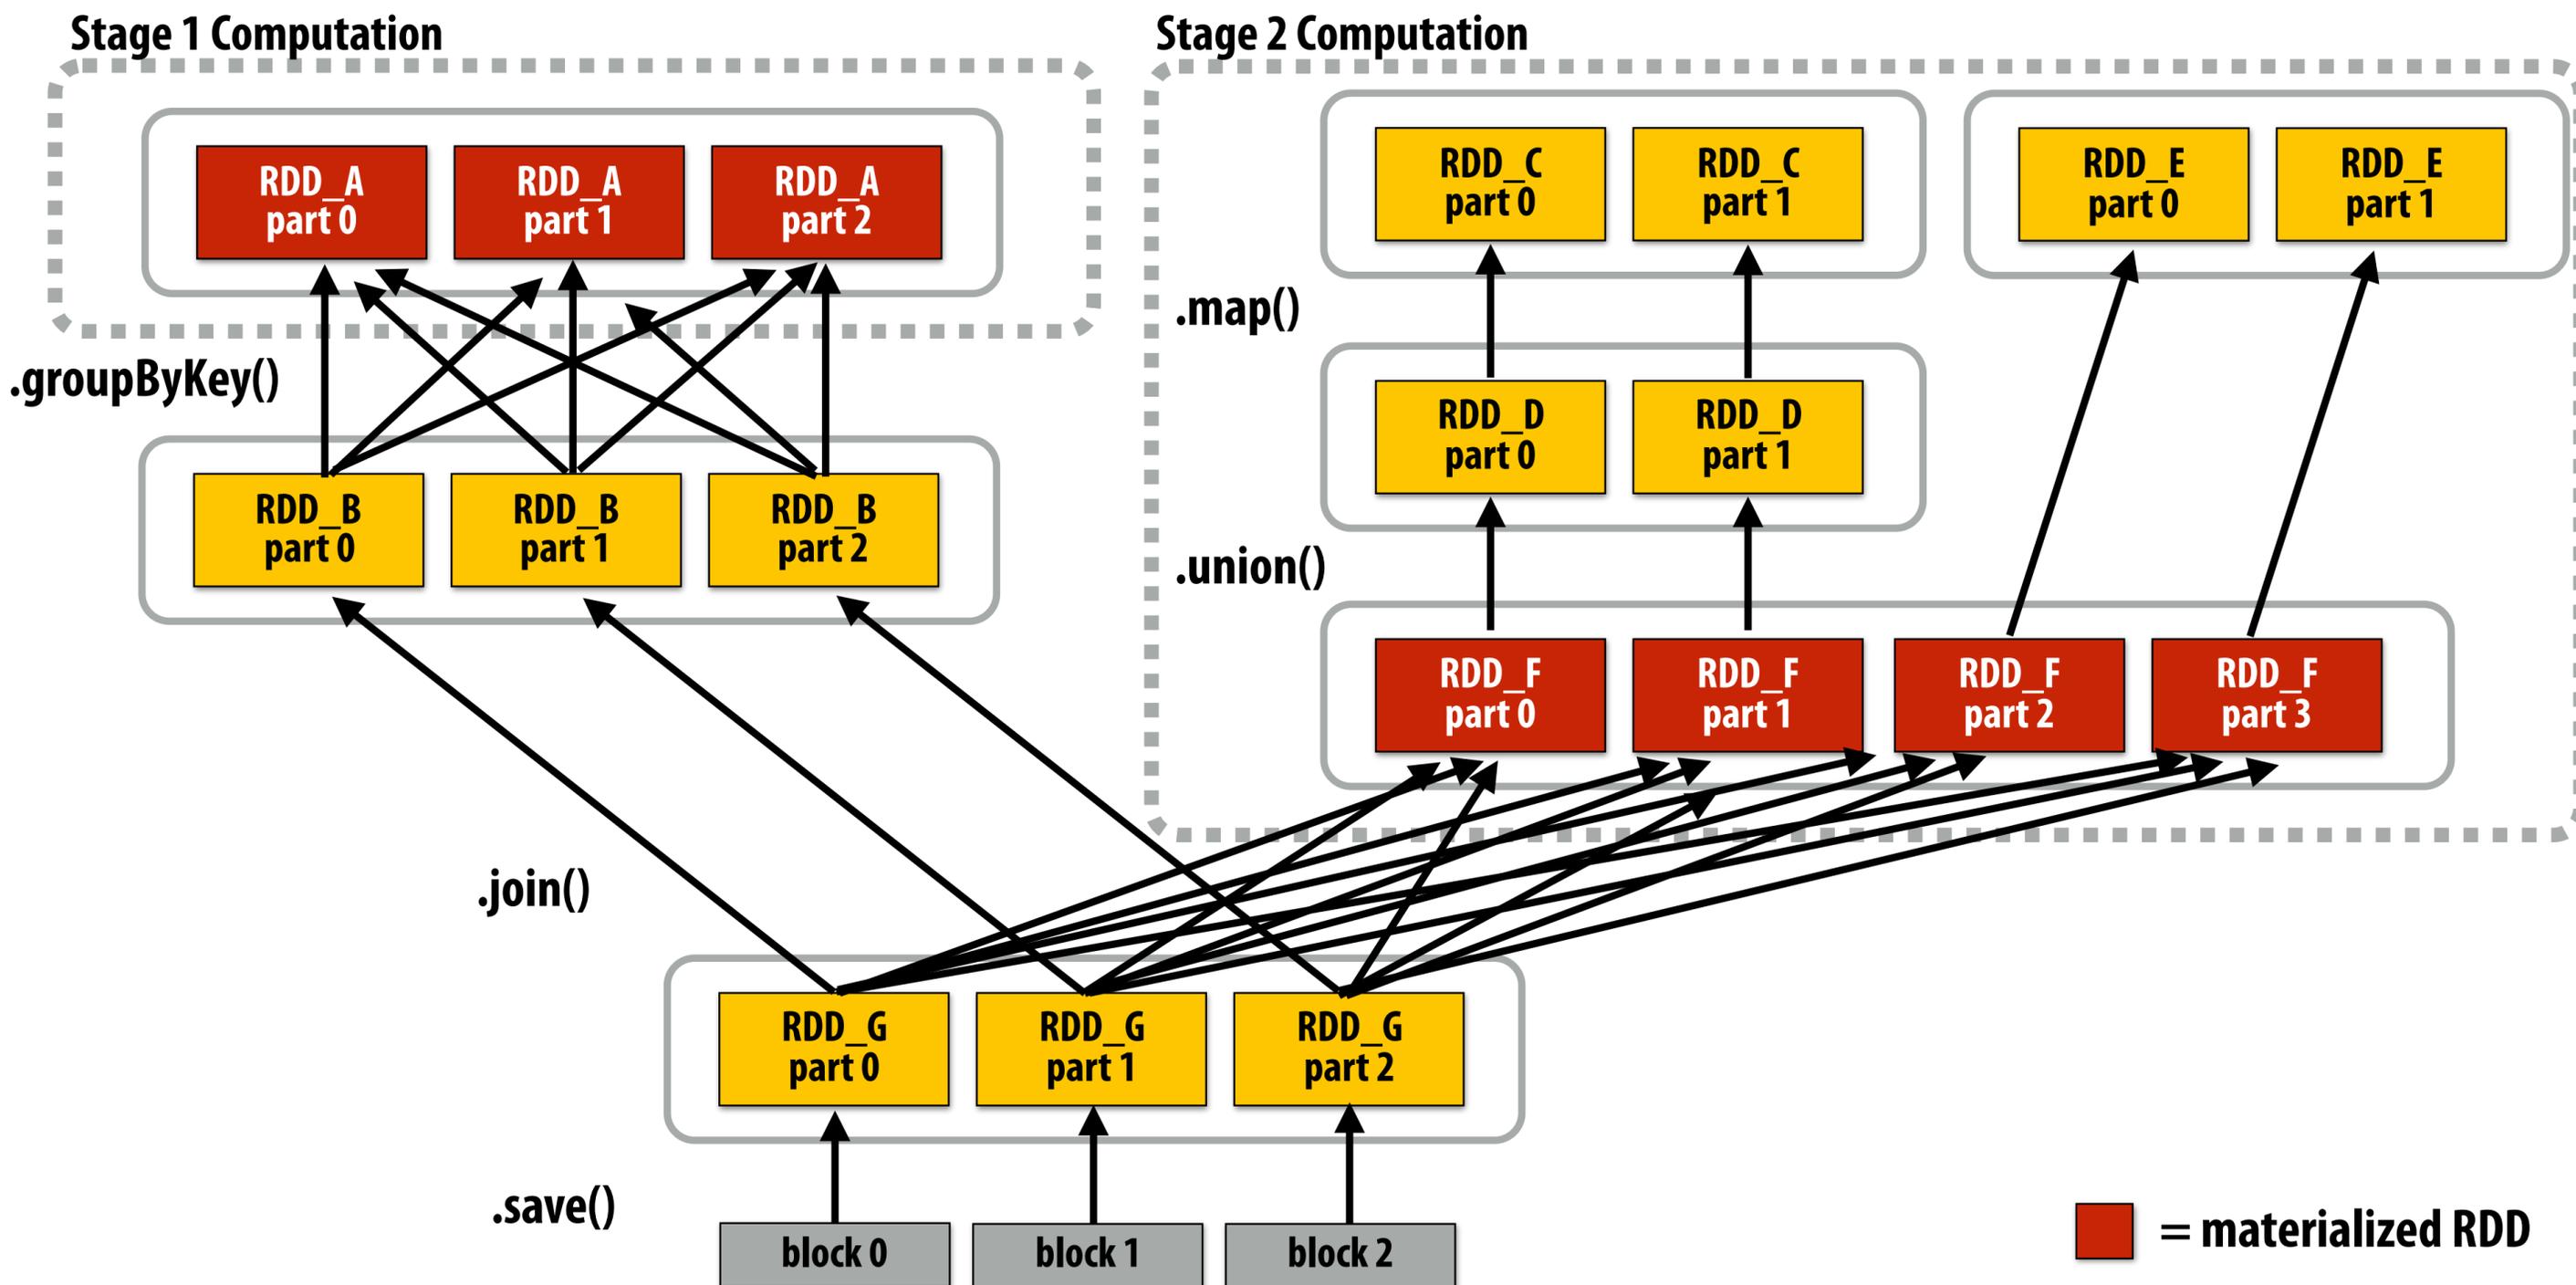

**Actions (e.g., save()) trigger evaluation of Spark lineage graph.**

Stage 1 Computation: do nothing since input already materialized in memory

Stage 2 Computation: evaluate map in fused manner, only actually materialize RDD F

Stage 3 Computation: execute join (could stream the operation to disk, do not need to materialize )


# Implementing resilience via lineage

- **RDD transformations are bulk, deterministic, and functional**
  - **Implication: runtime can always reconstruct contents of RDD from its lineage (the sequence of transformations used to create it)**
  - **Lineage is a log of transformations**
  - **Efficient: since the log records bulk data-parallel operations, overhead of logging is low (compared to logging fine-grained operations, like in a database)**

```
// create RDD from file system data
var lines = spark.textFile("hdfs://15418log.txt");

// create RDD using filter() transformation on lines
var mobileViews = lines.filter((x: String) => isMobileClient(x));



// 1. create new RDD by filtering only Chrome views
// 2. for each element, split string and take timestamp of
//    page view (first element)
// 3. convert RDD To a scalar sequence (collect() action)
var timestamps = mobileView.filter(_.contains("Chrome"))
    .map(_.split(" ")(0));
```

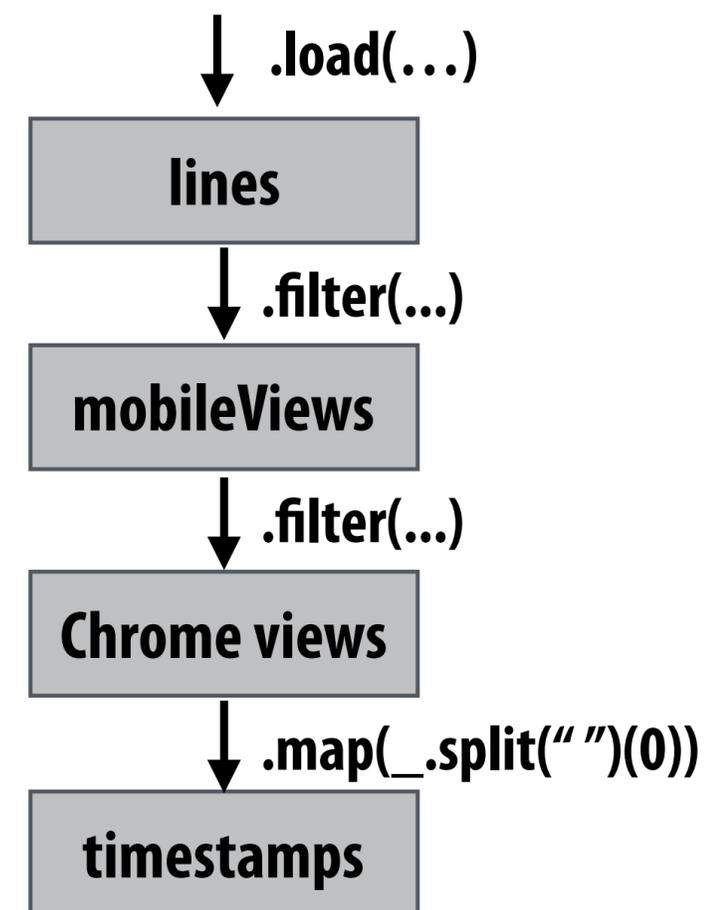

# Upon node failure: recompute lost RDD partitions from lineage

```
var lines      = spark.textFile("hdfs://15418log.txt");
var mobileViews = lines.filter((x: String) => isMobileClient(x));
var timestamps = mobileViews.filter(_.contains("Chrome"))
                        .map(_.split(" ")(0));
```

**Must reload required subset of data from disk and recompute entire sequence of operations given by lineage to regenerate partitions 2 and 3 of RDD timestamps.**

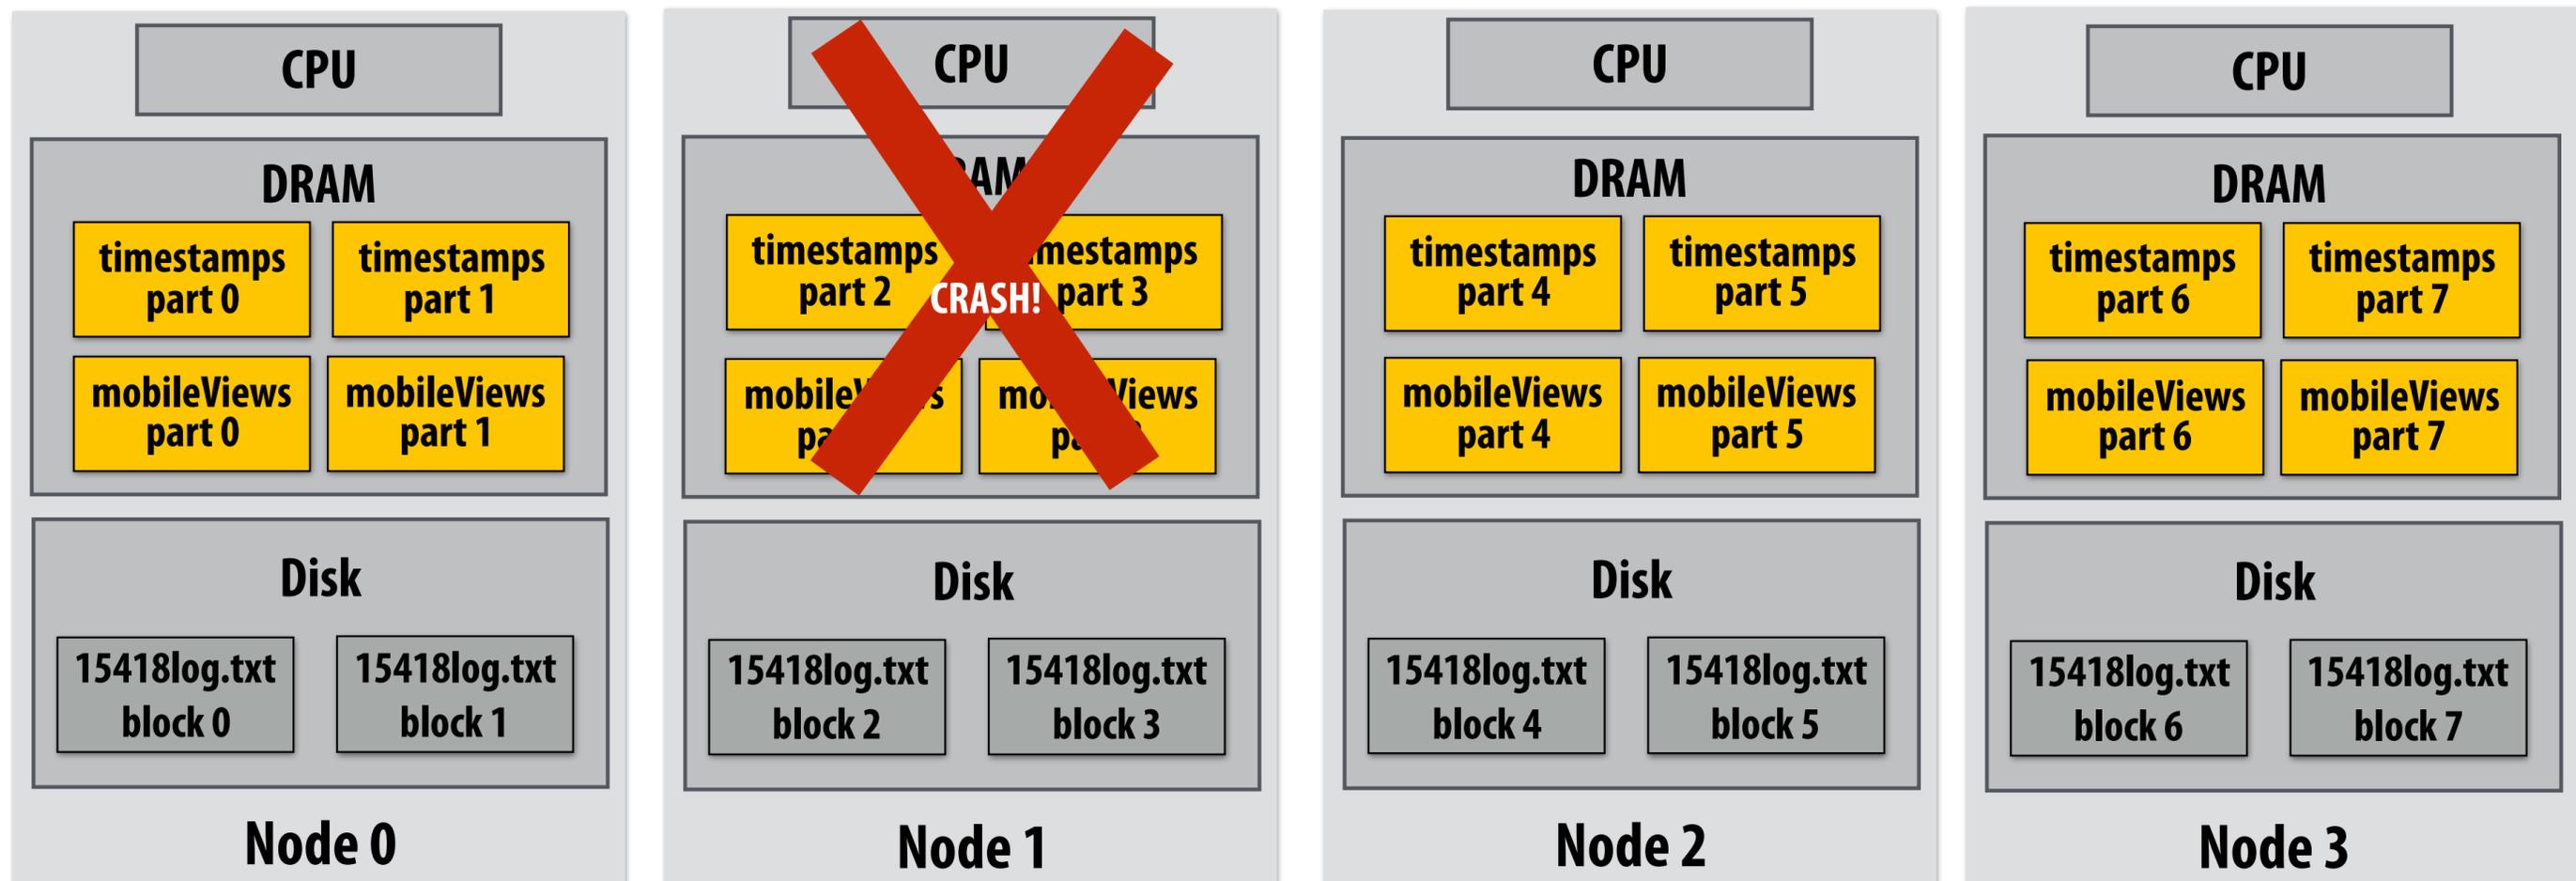
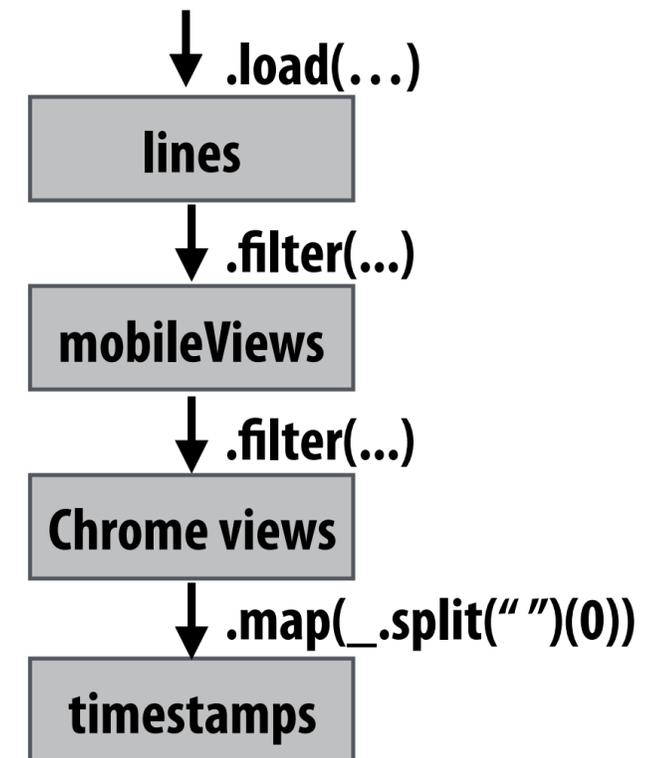


Note: (not shown): file system data is replicated so assume blocks 2 and 3 remain accessible to all nodes

# Upon node failure: recompute lost RDD partitions from lineage


```
var lines      = spark.textFile("hdfs://15418log.txt");
var mobileViews = lines.filter((x: String) => isMobileClient(x));
var timestamps  = mobileViews.filter(_.contains("Chrome"))
                    .map(_.split(" ")(0));
```

Must reload required subset of data from disk and recompute entire sequence of operations given by lineage to regenerate partitions 2 and 3 of RDD timestamps.

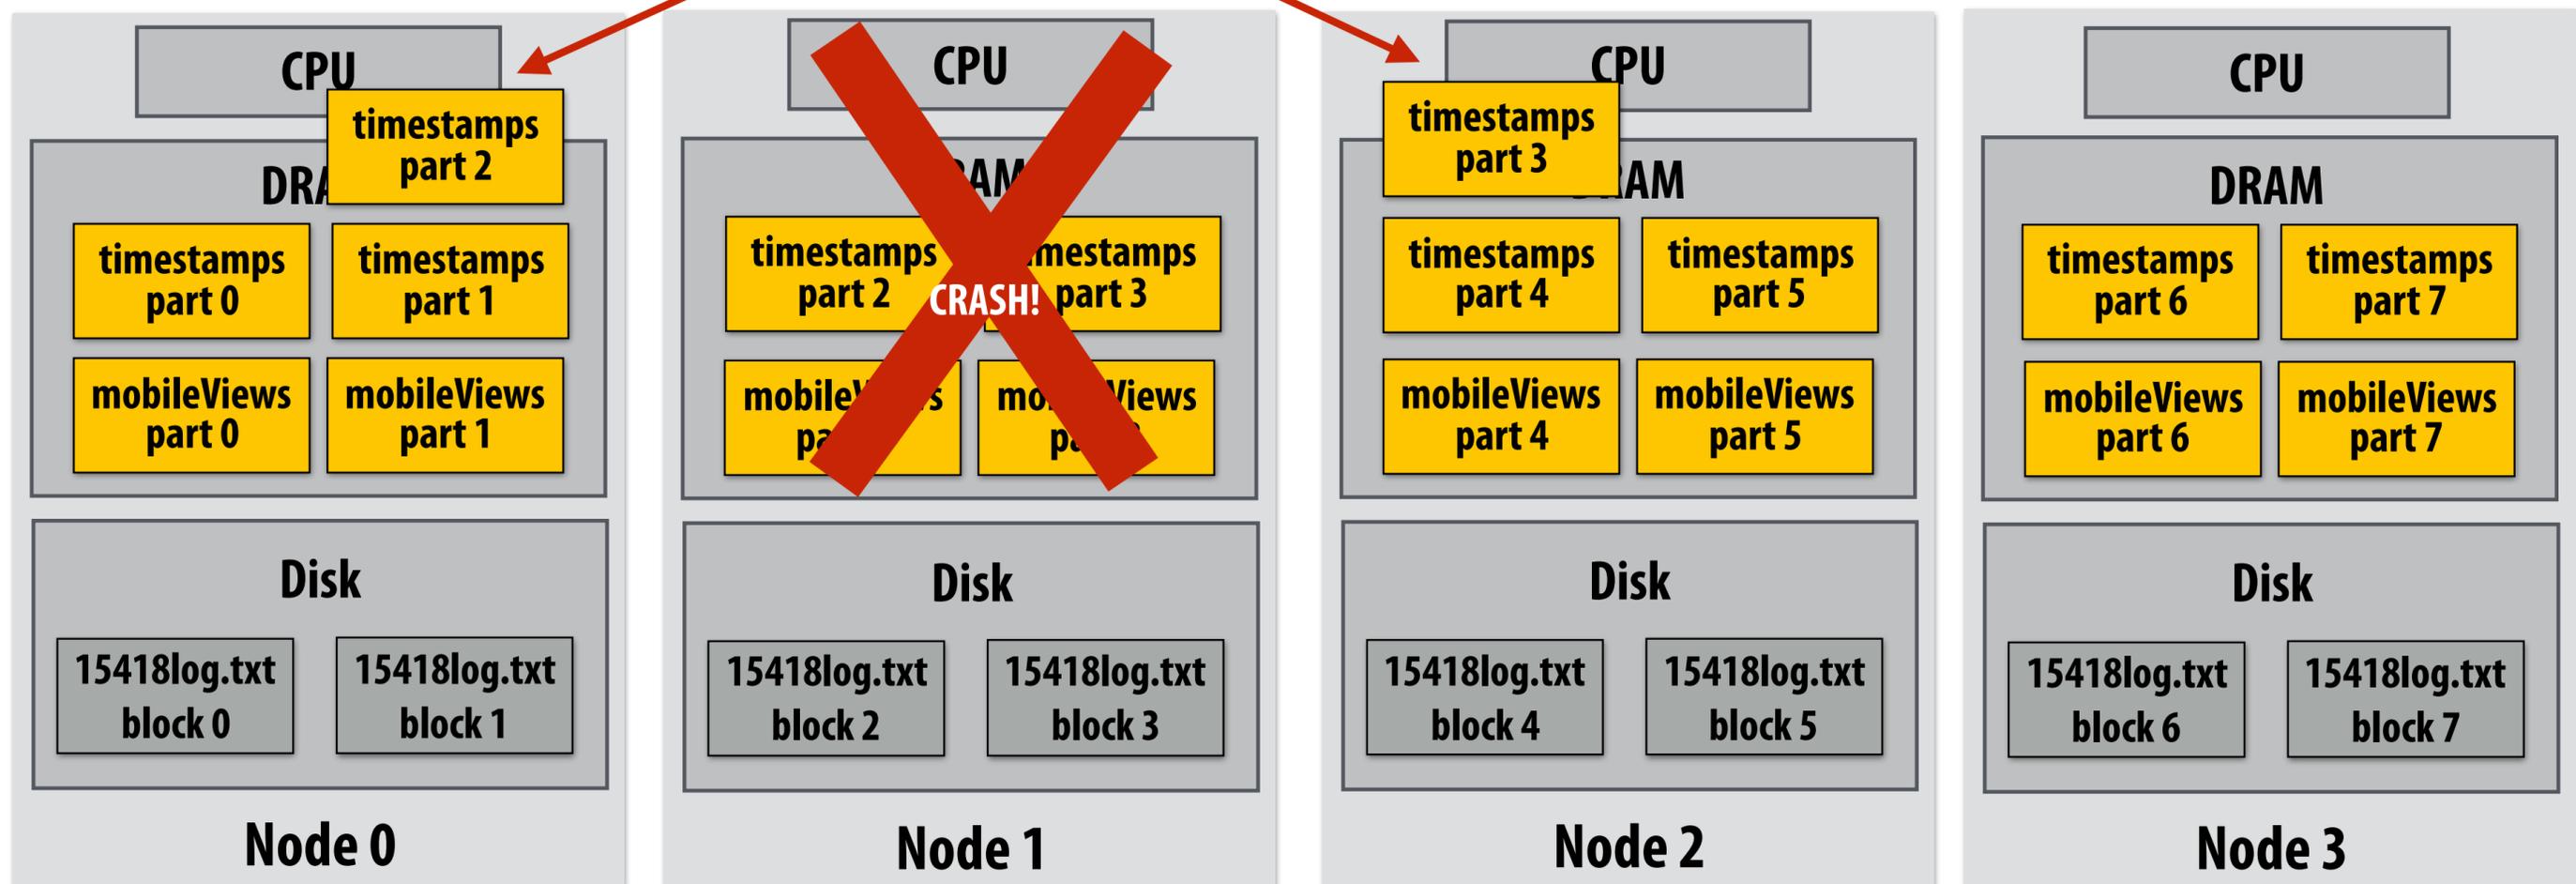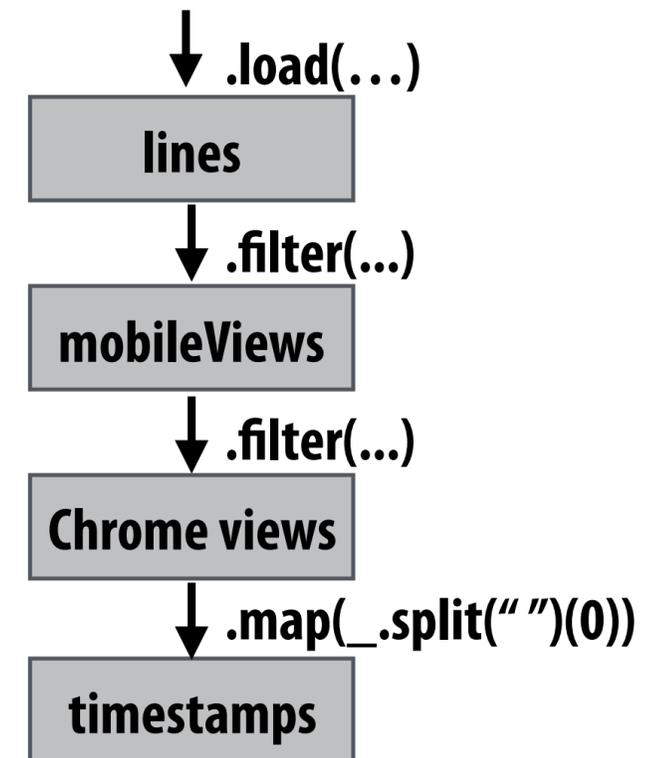

Note: (not shown): file system data is replicated so assume blocks 2 and 3 remain accessible to all nodes

# Spark performance

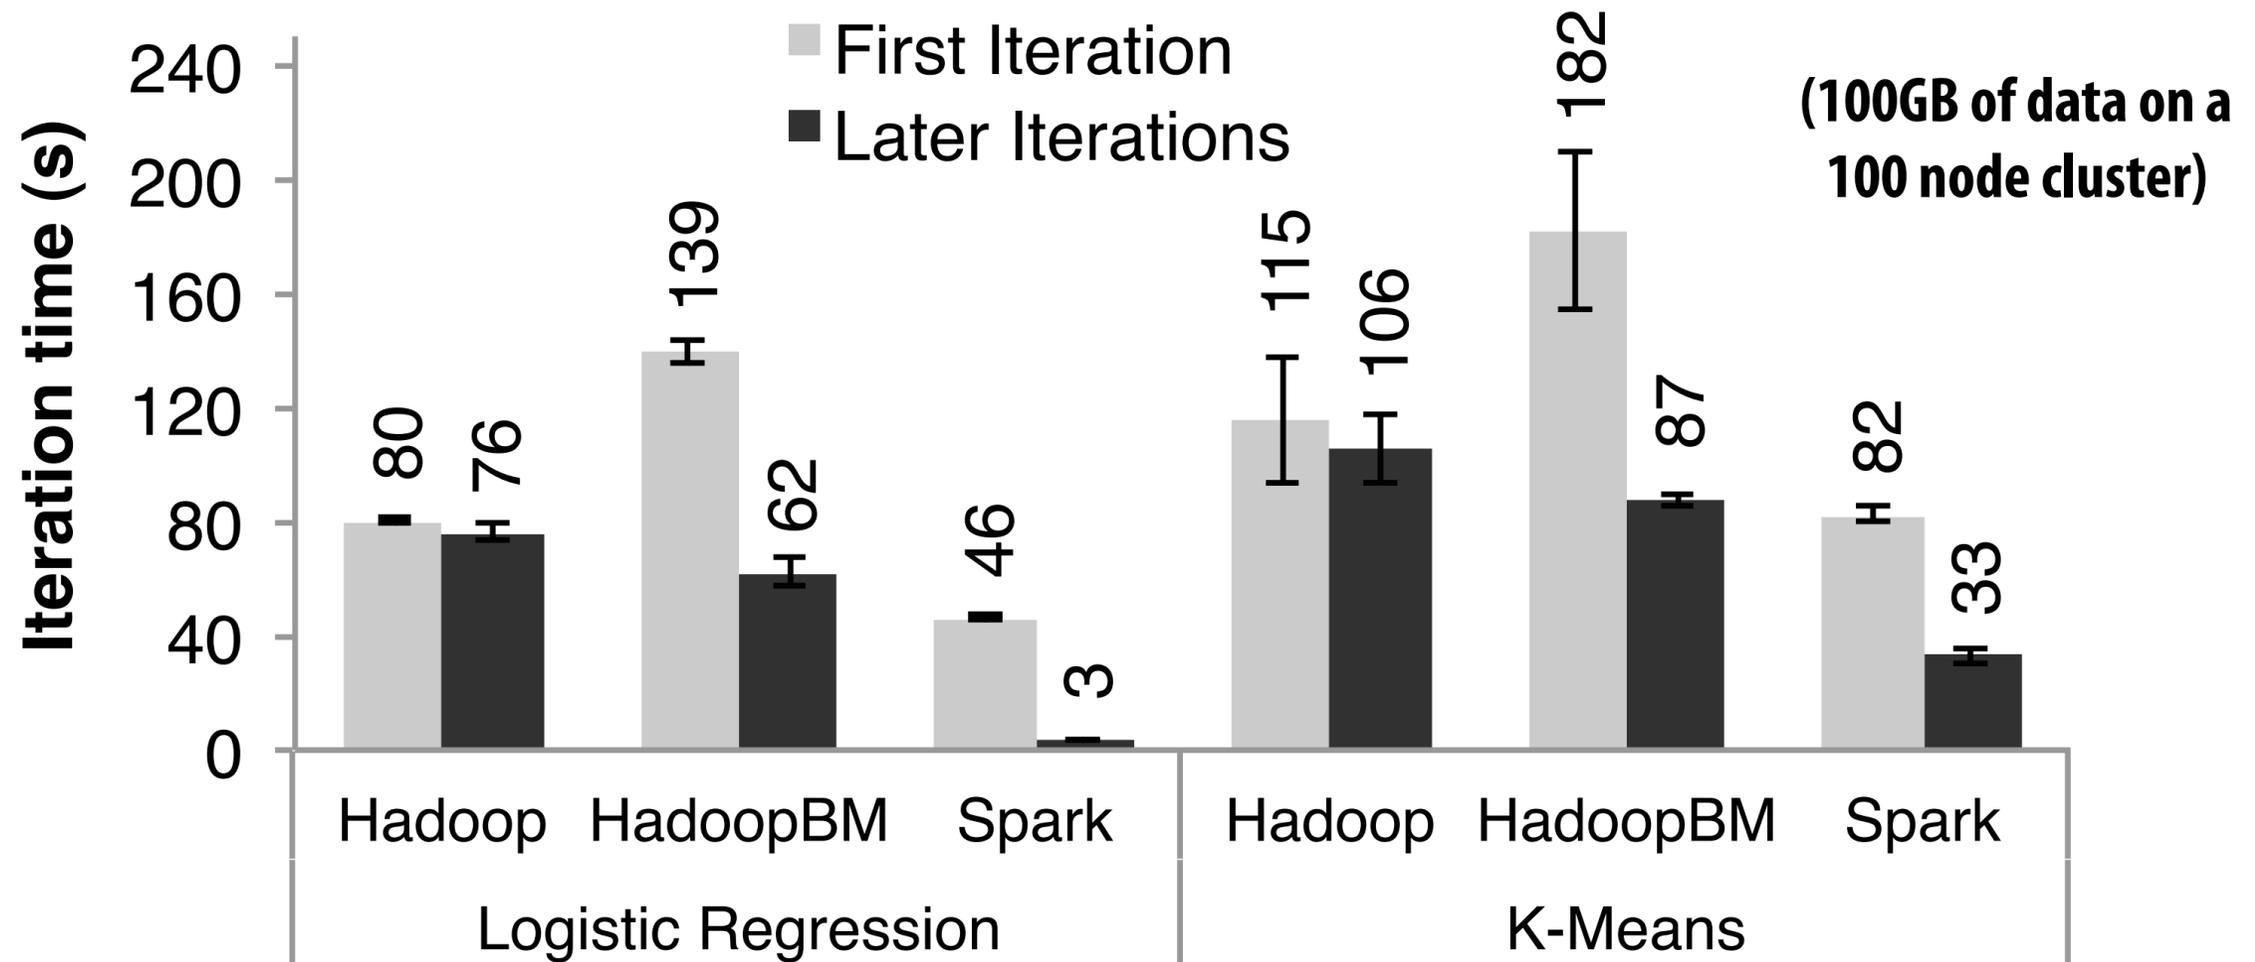

**HadoopBM = Hadoop Binary In-Memory (convert text input to binary, store in in-memory version of HDFS)**

**Q. Wait, the baseline parses text input in each iteration of an iterative algorithm? A. Yes.**

**Anything else puzzling here?**

**HadoopBM's first iteration is slow because it runs an extra Hadoop job to copy binary form of input data to in memory HDFS**

**Accessing data from HDFS, even if in memory, has high overhead:**

- Multiple mem copies in file system + a checksum
- Conversion from serialized form to Java object

# Caution: “scale out” is not the entire story

- Distributed systems designed for cloud execution address many difficult challenges, and have been instrumental in the explosion of “big-data” computing and large-scale analytics
  - Scale-out parallelism to many machines
  - Resiliency in the face of failures
  - Complexity of managing clusters of machines
  
- But scale out is not the whole story:

## 20 Iterations of Page Rank

scalable system	cores	twitter	uk-2007-05
GraphChi [10]	2	3160s	6972s
Stratosphere [6]	16	2250s	-
X-Stream [17]	16	1488s	-
Spark [8]	128	857s	1759s
Giraph [8]	128	596s	1235s
GraphLab [8]	128	249s	833s
GraphX [8]	128	419s	462s
Single thread (SSD)	1	300s	651s
Single thread (RAM)	1	275s	-

name	twitter_rv [11]	uk-2007-05 [4]
nodes	41,652,230	105,896,555
edges	1,468,365,182	3,738,733,648
size	5.76GB	14.72GB

Vertex order (SSD)	1	300s	651s
Vertex order (RAM)	1	275s	-
Hilbert order (SSD)	1	242s	256s
Hilbert order (RAM)	1	110s	-

↑  
**Further optimization of the baseline brought time down to 110s**

# Caution: “scale out” is not the entire story

## Label Propagation

[McSherry et al. HotOS 2015]

scalable system	cores	twitter	uk-2007-05
Stratosphere [6]	16	950s	-
X-Stream [17]	16	1159s	-
Spark [8]	128	1784s	$\geq 8000s$
Giraph [8]	128	200s	$\geq 8000s$
GraphLab [8]	128	242s	714s
GraphX [8]	128	251s	800s
Single thread (SSD)	1	153s	417s

from McSherry 2015:

“The published work on big data systems has fetishized scalability as the most important feature of a distributed data processing platform. While nearly all such publications detail their system’s impressive scalability, few directly evaluate their absolute performance against reasonable benchmarks. To what degree are these systems truly improving performance, as opposed to parallelizing overheads that they themselves introduce?”

**COST = “Configuration that Outperforms a Single Thread”**

Perhaps surprisingly, many published systems have unbounded COST—i.e., no configuration outperforms the best single-threaded implementation—for all of the problems to which they have been applied.

## BID Data Suite (1 GPU accelerated node)

[Canny and Zhao, KDD 13]

### Page Rank

System	Graph VxE	Time(s)	Gflops	Procs
Hadoop	?x1.1B	198	0.015	50x8
Spark	40Mx1.5B	97.4	0.03	50x2
Twister	50Mx1.4B	36	0.09	60x4
PowerGraph	40Mx1.4B	3.6	0.8	64x8
BIDMat	60Mx1.4B	6	0.5	1x8
BIDMat+disk	60Mx1.4B	24	0.16	1x8

### Latency Dirichlet Allocation (LDA)

System	Docs/hr	Gflops	Procs
Smola[15]	1.6M	0.5	100x8
PowerGraph	1.1M	0.3	64x16
BIDMach	3.6M	30	1x8x1

# Performance improvements to Spark

- **With increasing DRAM sizes and faster persistent storage (SSD), there is interest in improving the CPU utilization of Spark applications**
  - **Goal: reduce “COST”**
- **Efforts looking at adding efficient code generation to Spark ecosystem (e.g., generate SIMD kernels, target accelerators like GPUs, etc.) to close the gap on single node performance**
  - **RDD storage layouts must change to enable high-performance SIMD processing (e.g., struct of arrays instead of array of structs)**
  - **See Spark’s Project Tungsten, Weld [Palkar Cidr ’17], IBM’s SparkGPU**
- **High-performance computing ideas are influencing design of future performance-oriented distributed systems**
  - **Conversely: the scientific computing community has a lot to learn from the distributed computing community about elasticity and utility computing**

# Spark summary

- Introduces opaque sequence abstraction (RDD) to encapsulate intermediates of cluster computations (previously... frameworks like Hadoop/MapReduce stored intermediates in the file system)
  - **Observation: “files are a poor abstraction for intermediate variables in large-scale data-parallel programs”**
  - RDDs are read-only, and created by deterministic data-parallel operators
  - Lineage tracked and used for locality-aware scheduling and fault-tolerance (allows recomputation of partitions of RDD on failure, rather than restore from checkpoint \*)
    - Bulk operations allow overhead of lineage tracking (logging) to be low.
- Simple, versatile abstraction upon which many domain-specific distributed computing frameworks are being implemented.
  - See Apache Spark project: [spark.apache.org](http://spark.apache.org)

\* Note that `.persist(RELIABLE)` allows programmer to request checkpointing in long lineage situations.

# Modern Spark ecosystem

**Compelling feature: enables integration/composition of multiple domain-specific frameworks (since all collections implemented under the hood with RDDs and scheduled using Spark scheduler)**



```
sqlCtx = new HiveContext(sc)
results = sqlCtx.sql(
  "SELECT * FROM people")
names = results.map(lambda p: p.name)
```

**Interleave computation and database query**

**Can apply transformations to RDDs produced by SQL queries**



```
points = spark.textFile("hdfs://...")
               .map(parsePoint)
```

**Machine learning library build on top of Spark abstractions.**

```
model = KMeans.train(points, k=10)
```



**GraphLab-like library built on top of Spark abstractions.**

```
graph = Graph(vertices, edges)
messages = spark.textFile("hdfs://...")
graph2 = graph.joinVertices(messages) {
  (id, vertex, msg) => ...
}
```